

MEIGESI FASTENER

YUYAO MEIGESI FASTENER CO., LTD.

Add: Room 705, Wanda Plaza office building, No 322 Kaifeng Road, Yuyao, Zhejiang, China

Tel: +86 574 62853123

Fax: +86 574 62856896

Sales online:

Sales Department: rhino@nbrhino.com

Sales Branch1: jolin@nbrhino.com

Sales Branch2: maka@nbrhino.com

Sales Branch3: pan@nbrhino.com

Sales Branch4: Sales1@nbrhino.com

Sales Branch5: Sales2@nbrhino.com

Sales Branch6: Sales3@nbrhino.com

Sales Branch7: Sales4@nbrhino.com

Sales Branch8: Sales5@nbrhino.com


Sales Branch9: Sales7@nbrhino.com

Postcode: 315400





YUYAO MEIGESI FASTENER CO., LTD.

www.meigesifastener.com

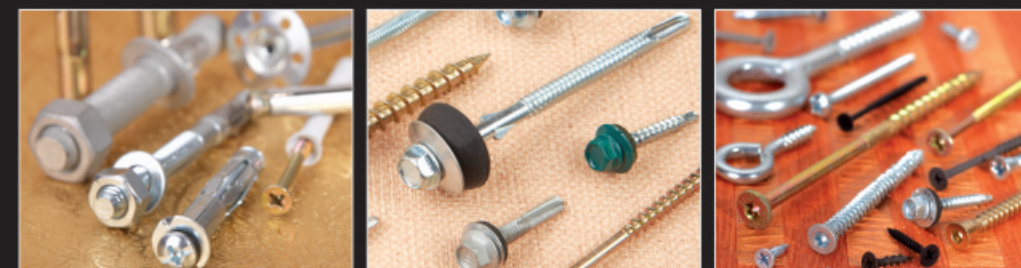

MEIGESI FASTENER



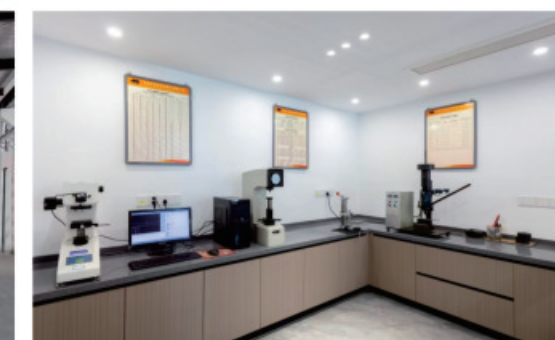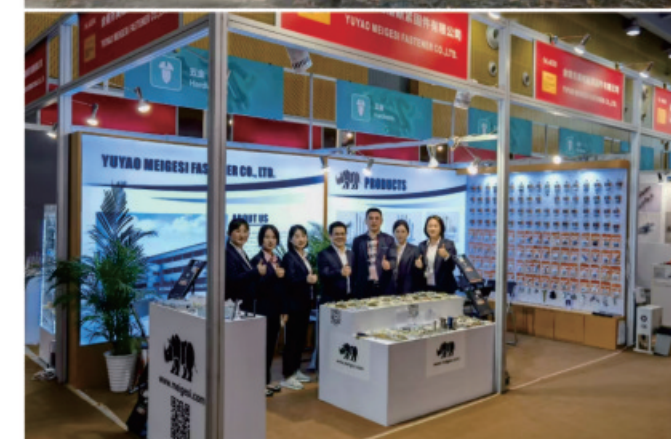

About us

YUYAO MEIGESI FASTENER CO., LTD. is a professional enterprise founded in year 2010, specialized in the production of all kinds of standard fasteners. The main products of MEIGESI FASTENER are architectural hardware (chipboard screws, drywall screws, nail screws, self-drilling / tapping screws, and other kinds of screws) and furniture hardware (confirmat screw, confirmat nuts and series of nails). Production can be based on DIN, ISO, ANSI, BS, JIS standard, as well as customer's own requirements. The main grades are 4.8, 5.8, 8.8, 12.9. MEIGESI FASTENER also achieved CE, BC1 and ISO certifications. To meet the demands of different customers, MEIGESI FASTENER supplies not only our own various kinds of screws, but also anchors, bolts, nuts, washers, riggings and other fasteners from our partner-companies.

MEIGESI FASTENER aims at profession, efficiency, honesty and innovation. Products are exported to Germany, Poland, France, Russia, Mexico, USA, etc. No matter the product itself or our professional services are enjoyed a high reputation in the field of hardware industry, and widely favored by customers!

Let us cooperate hand in hand, to create a beautiful future!



MEIGESI FASTENER

Our motto:

What we pursue and concern most is to satisfy our clients!

Our principle:

Being professional, efficient, honest and innovative.

Our target:

Let the world know about Meigesi Fastener. Make Meigesi Fastener be known to the world!

Our advantage:

Creating and providing our clients with highest value, superior quality and best service.

Table of contents

P01-23 Screws

P24-27 Nuts

P28-32 Bolts

P33-34 Washers

P35-44 Anchors

P45-48 Furniture Hardware

P49-55 Riggings

P56-57 Packages



www.meigesi.com

Wood Building Screw Countersunk Head Torx Drive With 6 Nibs & Type 17 Cutting Point

D	3.0	3.5	4.0	4.5	5.0	6.0	8.0	10.0
L	30-50	30-50	40-80	40-80	40-120	40-300	40-300	120-360

Wood Building Screw Wafer Head Torx Drive With 6 Nibs & Type 17 Cutting Point

D	4.0	4.5	5.0	6.0	8.0	10.0
L	40-80	40-80	40-120	40-300	40-360	120-360


Torx Drive Double Countersunk Head Chipboard Screw Pozi Drive Double Countersunk Head Chipboard Screw

Specification			
D	DK	K	L
2.5	4.8	2.6	8-25
3.0	6	3.2	12-50
3.5	7	3.6	12-70
4.0	8	4.2	12-90
4.5	9	4.6	16-100
5.0	10	5.2	20-120
6.0	12	6.2	20-220


Phill Drive Countersunk Head Chipboard Screw With 6 Nibs Under Head

Specification		
# 6 x 1/2	# 8 x 1 1/4	# 10 x 3 1/2
# 6 x 3/4	# 8 x 1 1/2	# 10 x 4
# 6 x 1	# 8 x 2	# 10 x 4 1/2
# 6 x 1 1/4	# 8 x 2 1/2	# 10 x 5
# 6 x 1 1/2	# 8 x 3	# 10 x 6
# 6 x 2	# 10 x 1 1/2	# 14 x 2
# 7 x 2 1/2	# 10 x 2	# 14 x 2 1/2
# 8 x 3/4	# 10 x 2 1/2	# 14 x 3
# 8 x 1	# 10 x 3	


Square Drive Countersunk Head Chipboard Screw

	Specification		
	6 x 1/2	8 x 2	10 x 4
	6 x 3/4	8 x 2 1/2	12 x 2 1/2
	6 x 1	8 x 3	12 x 3
	6 x 1 1/4	10 x 3/4	12 x 3 1/2
	6 x 1 1/2	10 x 1	12 x 4
	6 x 2	10 x 1 1/4	14 x 2
	8 x 3/4	10 x 1 1/2	14 x 2 1/2
	8 x 1	10 x 2	14 x 3
	8 x 1 1/4	10 x 2 1/2	14 x 3 1/2
	8 x 1 1/2	10 x 3	14 x 4
	8 x 1 3/4	10 x 3 1/2	


Torx Drive Flat Head Chipboard Screw, Type 17, Ruspert

	Specification	
	#6x1	#8x2 1/2
	#6x1 1/4	#8x3
	#6x1 5/8	#10x3 1/2
	#7x2	#10x4


Phill Drive Drywall Screw (Fine Thread / Coarse Thread) DIN18182

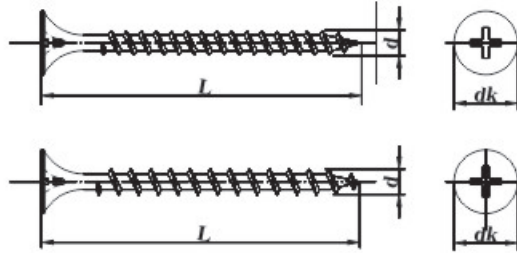	Specification		
	D	DK	L
	3.5	7.9-8.5	16-55
	3.9	7.9-8.5	65-70
	4.2	7.9-8.5	65-102
	4.8	8.8-9.4	90-152


Phill Drive Bugle Head Drywall Screw With Drilling Point

	Specification	
	3.5x19	3.5x55
	3.5x25	3.5x64
	3.5x28	3.5x76
	3.5x32	# 6-20x1
	3.5x35	# 6-20x1 3/8
	3.5x42	# 6-20x1 3/4
	3.5x45	# 6-20x2 1/4
	3.5x51	


Phill Drive Bugle Flat Head Drywall Screw, Ruspert

	Specification	
	3/16x1-1/4	3/16x3
	3/16x1-3/4	3/16x3-1/4
	3/16x2	3/16x3-3/4
	3/16x2-1/4	3/16x4
	3/16x2-3/4	3/16x5


Phill Drive Drywall Screw, Coarse Thread, Ruspert

	Specification	
	#6x1	#8x2 1/2
	#6x1 1/4	#8x3
	#6x1 5/8	#10x3 1/2
	#7x2	#10x4



Combo Drive Deck Screw, Ruspert

	Specification	
	#6x1 1/4	#9x3
	#6x1 5/8	#10 x3 1/2
	#8x 2	#10x4
	#9x2 1/2	


Phill Drive Countersunk Head High-Low Thread Self-Tapping Screw With Nibs Under Head

	Specification		
	3.9 x 19	3.9 x 25	3.9 x 35
	3.9 x 22	3.9 x 30	3.9 x 45


Phill Drive Truss (Wafer) Head Self- Tapping / Drilling Screw

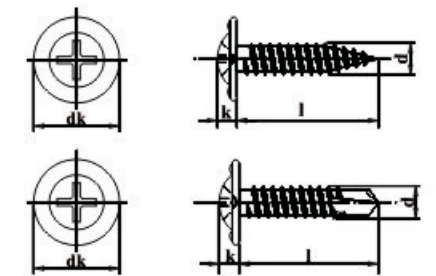
	Specification			
	d	dk	k	l
	4.2	10.6-11.2	2.5	13-75

Phill Drive Flat Washer Head Self-Tapping Screw


				Specification					
A	B	C	A	B	C				
10.6-11.2	13	4.2	10.6-11.2	41	4.2				
10.6-11.2	16	4.2	10.6-11.2	51	4.2				
10.6-11.2	19	4.2	10.6-11.2	65	4.2				
10.6-11.2	25	4.2	10.6-11.2	75	4.2				

Phill Drive Pan Framing Head Self-Tapping / Drilling Screw


				Specification					
A	B	C	D						
3.5	9.5	3.9	9.5						
3.5	11	3.9	11						
#6	7/16	#7	7/16						

				Specification					
A	B	C	D						
3.5	9.5	3.9	9.5						
3.5	11	3.9	11						
#6	7/16	#7	7/16						


Hexagonal Washer Head Self-Drilling Screw (DIN7504-K)

				Specification					
d	dk	s	k	l					
3.5	8.3	5.5	3.4	13-51					
3.9	8.3	5.5	3.8	13-80					
4.2	8.8	7.0	4.0	13-100					
4.8	10.5	8.0	4.3	13-100					
5.5	11.0	8.0	5.3	19-130					
6.3	13.2	10.0	6.3	19-200					


Hex Washer Head Self Drilling Screw With EPDM Washer, RAL Painted

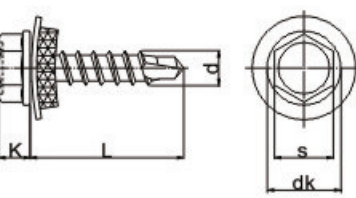		Specification	
		D	L
		4.8	19-76
		5.5	19-76

Roofing Screw With EPDM Washer, PT5 Drilling Point, Strips On Body

				Specification					
5.5	25	5.5	60						
5.5	32	5.5	70						
5.5	38	5.5	80						
5.5	51	5.5	90						


Hex Washer Head Self-Drilling Screw

				Specification					
# 8-18	5/8	# 12-14	1						
# 8-18	3/4	# 12-14	1 1/2						
# 10-16	3/4	# 12-14	2						
# 12-14	3/4	# 12-14	7/8						


Hex Washer Head Self-Tapping Screw With EPDM Washer, Type 17

		Specification	
D	L		
#12(5.5mm)	1"-5"		
#14(6.3mm)	1"-7"		


Sandwich Panels Screw, With 3 Cutting On Thread, PT5, Drilling Point

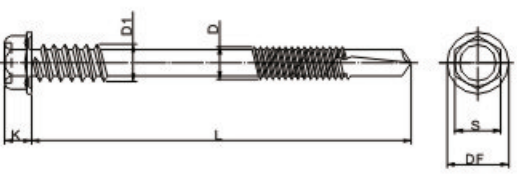				Specification					
6.3/5.5	75	6.3/5.5	105	6.3/5.5	120	6.3/5.5	160	6.3/5.5	200
6.3/5.5	90	6.3/5.5	110	6.3/5.5	135	6.3/5.5	185	6.3/5.5	205
6.3/5.5	100	6.3/5.5	115	6.3/5.5	155	6.3/5.5	190	6.3/5.5	230


Hex Flanged Head Self Drilling Screw With EPDM Sealing Washer

				Specification					
#12-14	3/4	#12-14	1						
#12-14	1	#12-14	1 1/4						
#12-14	1 1/2	#12-14	1 1/2						
#12-14	2	#12-14	2						


Cross Round Head Bi-metal Self-Drilling Screw Point #2, Ruspert

	
Specification	
Size	4.8-16x25mm
Material	SUS304+SCM435


Cross Countersunk Head Bi-metal Self-Drilling Screw Point #2, Ruspert

	
Specification	
Size	4.8-16x25mm
Material	SUS304+SCM435


Bi-Metal Hex Head Self-Drilling Screw Point #3, With Stainless Steel Composite Gasket, Ruspert

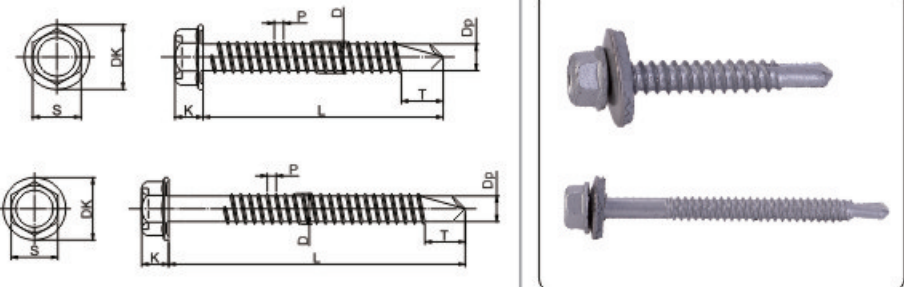	
Specification	
Size	5.5-14x25mm
	5.5-14x32mm
	6.3-14x32mm
	6.3-14x75mm
Material	SUS304+SCM435


Bi-Metal Hex Head Self-Drilling Screw Point #3, With Stainless Steel Composite Gasket, Ruspert

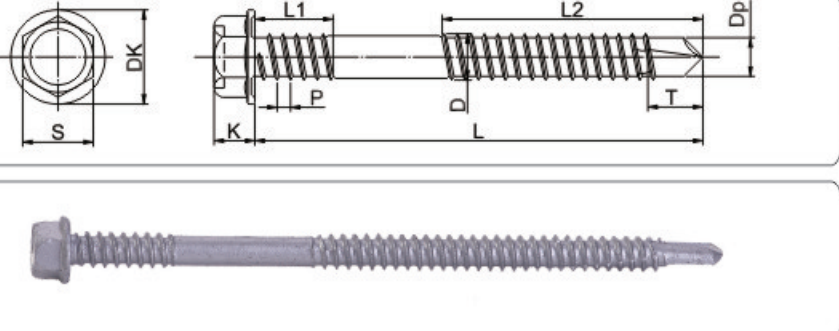	
Specification	
Size	5.5-14x100mm
Material	SUS304+SCM435

Bi-Metal Hex Head Self-Drilling Screw Point #5, With Stainless Steel Composite Gasket, Ruspert

	
Specification	
Size	5.5-24x32mm
Material	SUS304+SCM435


Hex Flanged Head, Self Drilling Screw, Double Thread, With EPDM Sealing Washer

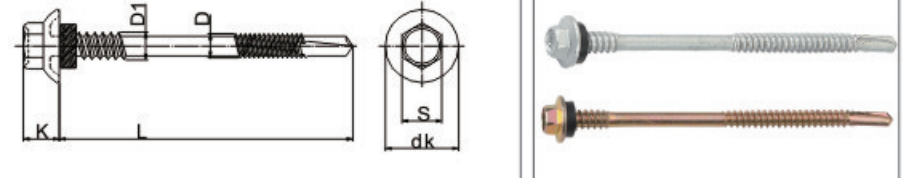	
Specification	
# 12-14/14-14x2	
# 12-14/14-14x2 3/8	
# 12-14/14-14x2 3/4	
# 12-14/14-14x3 1/4	
# 12-14/14-14x3 1/2	
# 12-14/14-14x4	
# 12-14/14-14x5	


Hex Flanged Head Self Drilling Screw With EPDM Sealing Washer, 1000h Ruspert

	
Specification	
5.5x25	
5.5x40	
5.5x65	
5.5x90	


Hex Flanged Head, Self Drilling Screw, Double Thread, With EPDM Sealing Washer, 500h Dacrotized / Yellow Zinc Plated

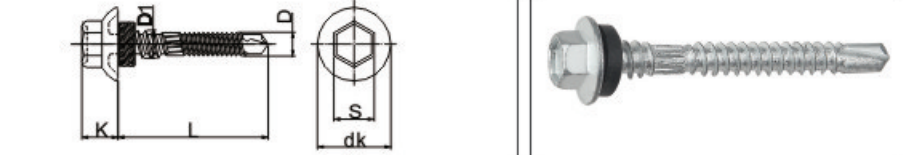	
Specification	
D	L
#12-14	2" - 5"


Hex Flanged Head Self-Tapping Screw With EPDM Washer, Type 17

	
Specification	
D	L
#12(5.5mm)	1"-5"
#14(6.3mm)	1"-7"

Hex Flanged Head Self Tapping Screw High-Low Thread, Type 17 Cutting, With EPDM Sealing Washer

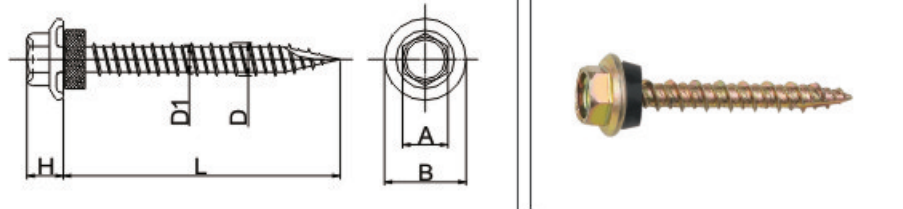	
Specification	
10x1	10x2 1/2
10x1 1/2	10x2 3/4
10x1 3/4	10x3
10x2	10x4



Pan Head Phill Drive Self-Drilling Screw (DIN7504-N)

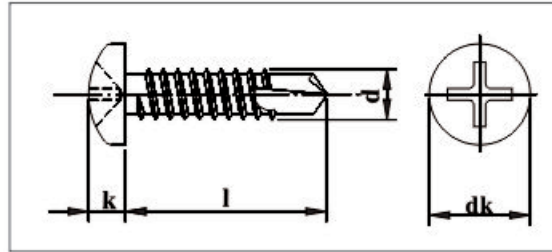



Specification

d	l
3.5	13-55
3.9	13-65
4.2	13-100
4.8	13-100
5.5	13-100
6.3	13-100


Countersunk Head Phill Drive Self-Drilling Screw (DIN7504-P)

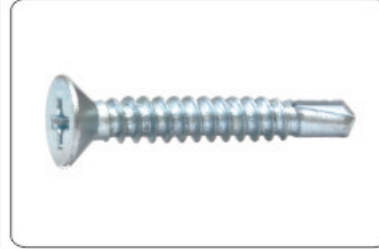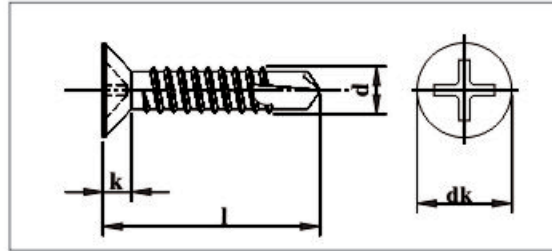

Raised Countersunk Head Phill Drive Self-Drilling Screw (DIN7504-Q)

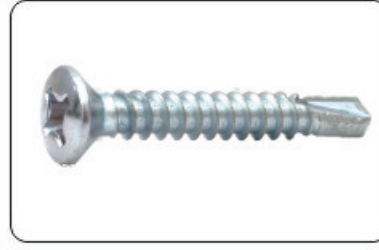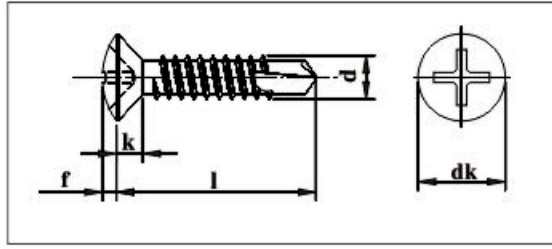



Phill Drive Flat Head Self Drilling Screw With 4 Nibs Under Head, Zinc Plated

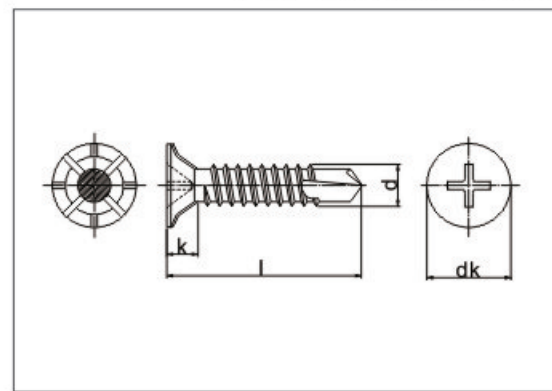

Specification



# 7-19x1/2	# 8-18x1 1/4
# 7-19x5/8	# 8-18x1 1/2
# 7-19x3/4	# 10-16x3/4
# 7-19x1	# 10-16x1
# 8-18x1/2	# 10-16x1 1/4
# 8-18x5/8	# 10-16x1 1/2
# 8-18x3/4	# 10-16x1 3/4
# 8-18x1	# 10-16x2

Phill Drive # 2 Flat Head Self Drilling Screw, With Wings, Dacrotized / Zinc Plated

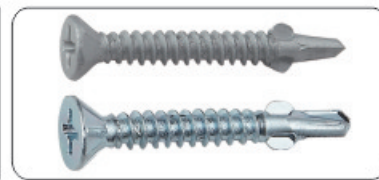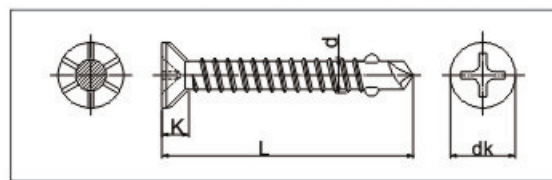

Specification


# 12-14x1 3/4	# 12-14x2 1/4
12x1/12	# 12-14x2 1/2
# 12-14x2	# 12-14x3

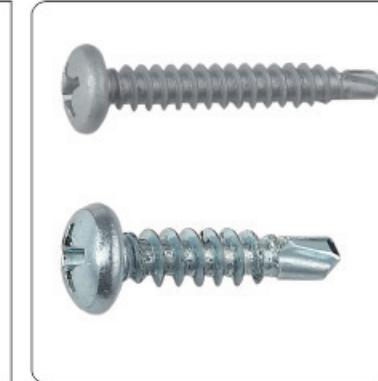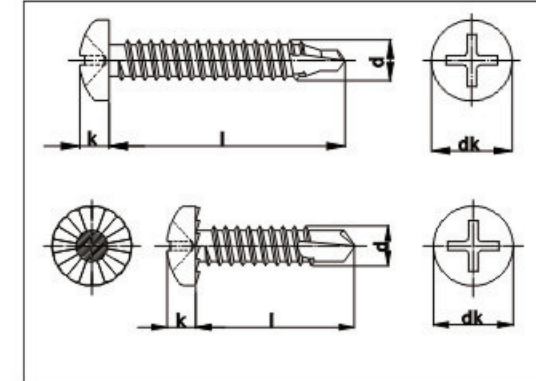Phill Drive Pan Head Self Drilling Screw, Dacrotized
Phill Drive Pan Head Self Drilling Screw, Zinc Plated

Specification

#6-20x1/2	# 7-19x3/4	# 8-18x1 1/4
# 6-20x3/8	# 7-19x1	# 8-18x1 1/2
# 6-20x7/16	# 8-18x1/2	# 10-16x3/4
# 6-20x1/2	# 8-18x3/8	# 10-16x1 1/4
# 6-20x3/4	# 8-18x5/8	# 10-16x1
# 7-19x1/2	# 8-18x3/4	# 10-16x1 1/2
# 7-19x5/8	# 8-18x1	# 10-16x2



Phill Drive # 2 Flat Head Self Drilling Screw, With 6 Nibs, With Wings, Dacrotized/Ruspart

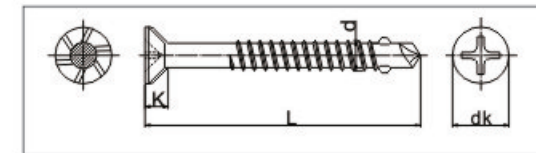

Specification


D	L
#12-14	1 1/3 - 3"
5.5	16-125

Phill Drive Self-Drilling / Self-Tapping Window Screw

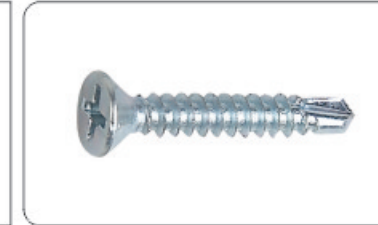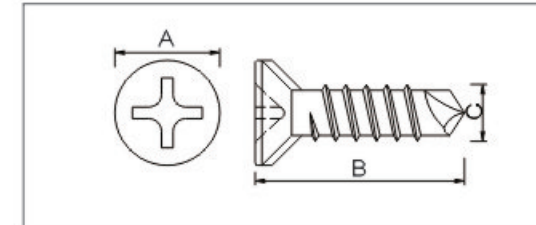

Specification


3.9x13	3.9x25	3.9x41
3.9x16	3.9x32	3.9x45
3.9x19	3.9x35	3.9x50
3.9x22	3.9x38	3.9x60

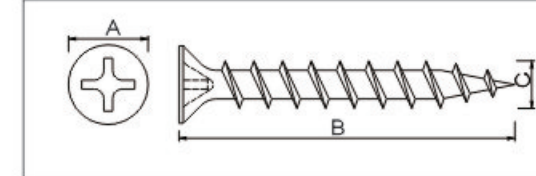

Specification

4.0x16	4.0x30	4.0x45
4.0x20	4.0x35	4.0x50
4.0x25	4.0x40	


Bugle Screw For Wood, Hexagon Drive, Type 17, 4 Nibs Under Head, Mechanical Galvanized

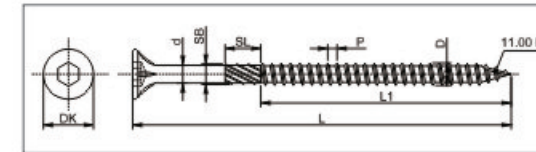

Specification

D	L
14 # (6.3mm)	100mm
14 # (6.3mm)	125mm


Hex Roofing Screw For Steel, Type 17, UNC-11, Mechanical Galvanized

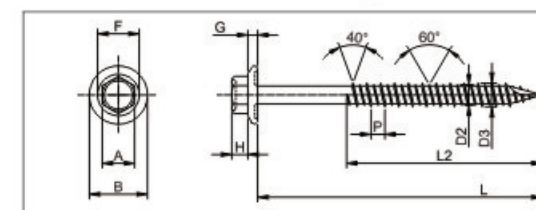

Specification


D	L
12 # (5.5mm)	65mm

Concrete Screw T25 or T30

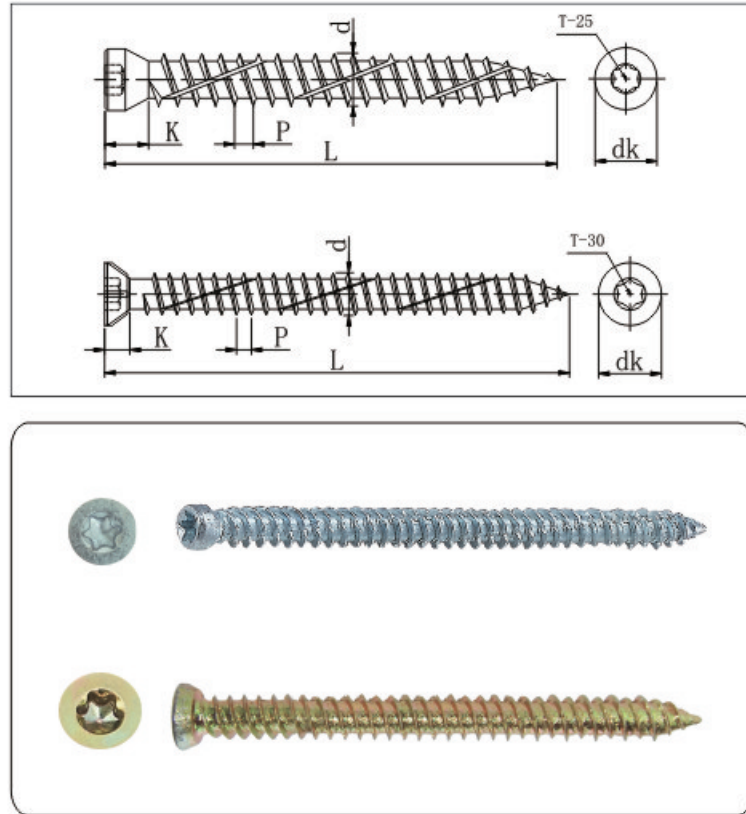


Specification					
Size	d	dk	K	P	L
7.5x52	7.5	11	3.4	2.6	52
7.5x62	7.5	11	3.4	2.6	62
7.5x72	7.5	11	3.4	2.6	72
7.5x85	7.5	11	3.4	2.6	82
7.5x92	7.5	11	3.4	2.6	92
7.5x102	7.5	11	3.4	2.6	102
7.5x112	7.5	11	3.4	2.6	112
7.5x122	7.5	11	3.4	2.6	122
7.5x132	7.5	11	3.4	2.6	132
7.5x142	7.5	11	3.4	2.6	142
7.5x152	7.5	11	3.4	2.6	152
7.5x162	7.5	11	3.4	2.6	162
7.5x172	7.5	11	3.4	2.6	172
7.5x182	7.5	11	3.4	2.6	182
7.5x192	7.5	11	3.4	2.6	192
7.5x202	7.5	11	3.4	2.6	202
7.5x212	7.5	11	3.4	2.6	212
7.5x222	7.5	11	3.4	2.6	222
7.5x252	7.5	11	3.4	2.6	252
7.5x302	7.5	11	3.4	2.6	302

Hex Head, Concrete Nail Screw, 1000h Ruspert
 Slotted Hex Head, Concrete Screw, High-Low Thread
 Phill Hex Head, Concrete Screw, High-Low Thread
 Phill CSK Head, Concrete Screw, High-Low Thread

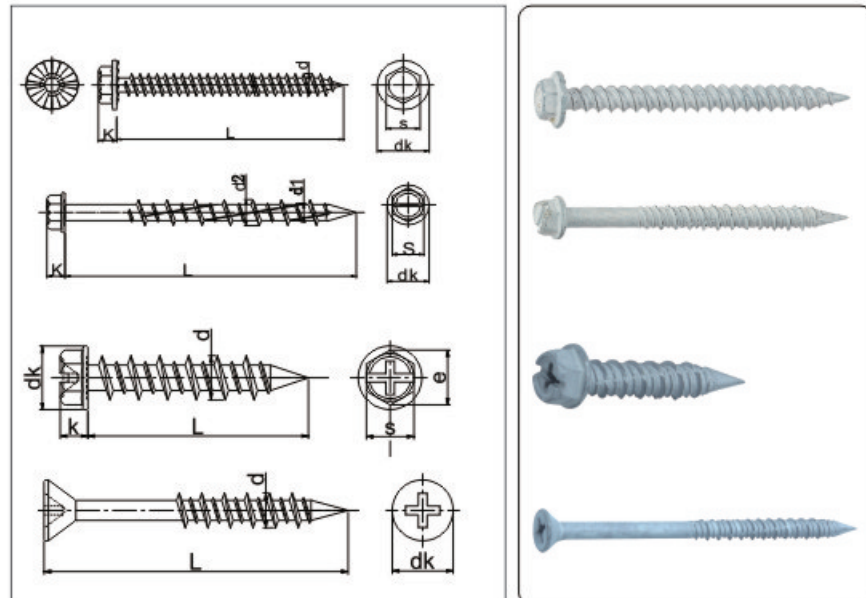


Specification	
d	L
3/16	1-1/4 - 6"
1/4	1-1/4 - 6"

Hex Head Heavy Duty Concrete Screw

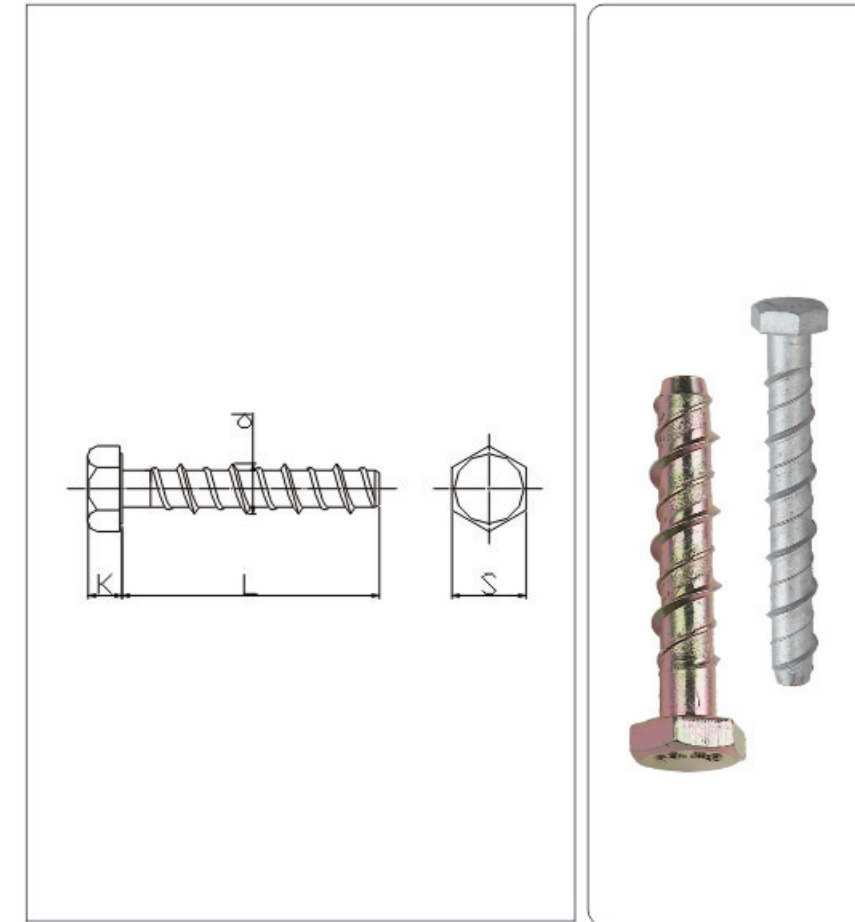

Specification			
size	Thread Length (mm)	size	Thread Length (mm)
6.5x30	21	12x100	92
6.5x45	36	12x130	120
6.5x50	41	12x150	120
6.5x75	66	12x170	120
6.5x100	80	12x190	120
6.5x120	80	12x210	120
8x50	42	12x230	120
8x60	52	12x250	120
8x65	57	12x290	120
8x75	67	12x310	120
8x100	80	14x80	72
10x60	52	14x115	107
10x75	67	14x135	120
10x100	92	14x160	120
10x120	100	16x90	82
10x125	100	16x100	82
10x140	100	16x130	122
10x150	100	16x150	142
10x160	100	16x180	150
10x200	100	16x200	150
10x240	100	16x240	150
10x280	100	16x280	150
12x75	67	16x320	150

Hex Washer Head Concrete Screw With Serration Under Head

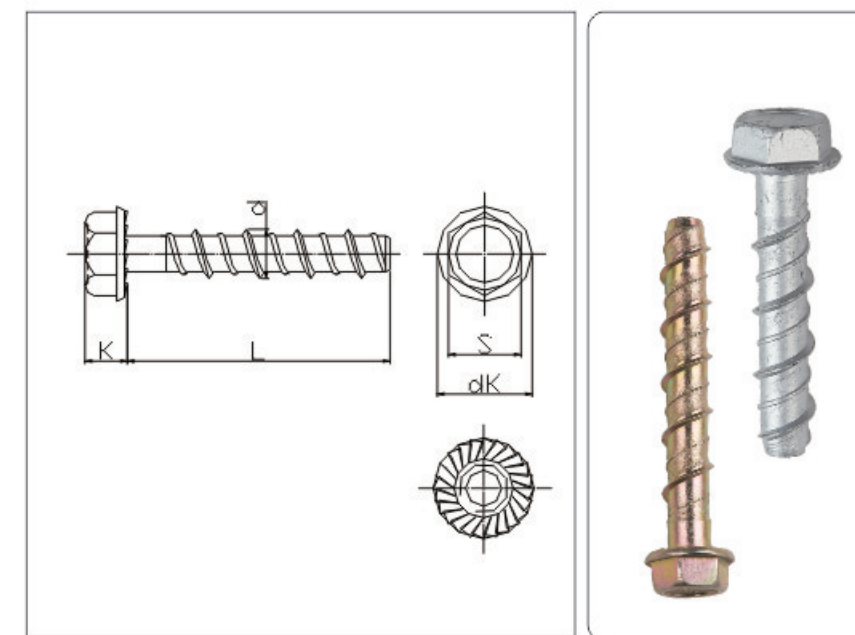

Specification			
size	Thread Length (in)	size	Thread Length (in)
1/4x1-3/4	1.40	1/2x14	4
1/4x2-3/4	2.40	1/2x15	4
1/4x3	2.6	5/8x4	3.5
3/8x3	2.6	5/8x5	4.5
3/8x4	3	5/8x6	5
3/8x5	3	5/8x6-1/2	5
3/8x6	3	5/8x8	5
1/2x3	2.5	3/4x4	3.4
1/2x4	3.5	3/4x5	4.4
1/2x5	4	3/4x6	5.4
1/2x6	4	3/4x7	6
1/2x8	4	3/4x8-1/2	6
1/2x12	4	3/4x10	6
1/2x13	4		

Hanger Bolts With Wood & Metric Threads Hex Center & Torx Drive

Specification						
D	4.0	5.0	6.0	8.0	10.0	12.0
L	20-40	25-50	40-150	50-250	50-300	100-200

Hanger Bolt Double End Point With Wood Thread

Specification				
6x80	8x100	8x200	10x120	12x160
6x100	8x140	10x100	10x140	12x200

Hanger Bolt With Washer

Specification				
4x40	5x50	6x45	7x50	8x40
4x50	5x60	6x50	7x60	8x50
5x20	5x65	6x60	7x70	8x60
5x25	5x70	6x65	7x80	8x80
5x30	6x20	6x70	8x40	10x50
5x35	6x30	6x75	8x50	10x60
5x40	6x35	7x30	8x60	10x80
5x45	6x40	7x40	8x80	

Hanger Bolt Double Threads With Torx Drive

Specification				
4x20	6x80	8x120	10x80	10x250
4x25	6x90	8x130	10x90	10x300
4x30	6x100	8x140	10x100	12x100
4x35	6x120	8x150	10x110	12x120
4x40	6x150	8x160	10x120	12x140
5x25	8x50	8x180	10x130	12x160
5x40	8x60	8x200	10x140	12x180
5x50	8x70	8x220	10x150	12x200
6x40	8x80	8x250	10x160	
6x50	8x90	10x50	10x180	
6x60	8x100	10x60	10x200	
6x70	8x110	10x70	10x220	

Hanger Bolt Without Hexagon

Specification		
8x50	8x180	10x130
8x60	8x200	10x140
8x70	8x220	10x150
8x80	8x250	10x160
8x90	10x50	10x180
8x100	10x60	10x200
8x110	10x70	10x220
8x120	10x80	10x250
8x130	10x90	10x300
8x140	10x100	
8x150	10x110	
8x160	10x120	

Hexagonal Head Wood Screw (DIN571)/Lag Screw

Specification				
D	5.0	6.0	7.0	8.0
L	20-80	20-160	30-200	20-300
D	10.0	12.0	16.0	20.0
L	30-360	35-400	50-400	80-300
D	3/16	1/4	5/16	3/8
L	1 1/3"	1"-6"	1 1/2"-8"	1 1/2"-12"
D	1/2	5/8	3/4	7/8
L	1 1/2"-12"	2"-12"	2"-12"	3"-12"

Hexagonal Head Wood Screw
Hex Flanged Head / Double Countersunk Head Wood Screw

Specification	
D	L
7	80-325
9	80-325
10	80-325


Cross Recessed Countersunk Head Wood Screw (DIN7997)

d	dk	k	l
3.0	5.6	1.65	10-40
3.5	6.5	1.93	12-50
4.0	7.5	2.2	12-70
4.5	8.3	2.35	16-70
5.0	9.2	2.5	16-100
6.0	11.0	3.0	20-140

Slotted Oval Countersunk Head Wood Screw (DIN95)


Specification							
d	dk	k	n	t	f	k	l
2.5	4.7	1.5	0.6	1.0-1.2	0.60	1.5	10-25
3.0	5.6	1.65	0.8	1.2-1.45	0.75	1.65	10-40
3.5	6.5	1.93	0.8	1.4-1.7	0.90	1.93	12-50
4.0	7.5	2.2	1.0	1.6-1.9	1.00	2.2	12-70
4.5	8.3	2.35	1.0	1.8-2.1	1.10	2.35	16-70
5.0	9.2	2.5	1.2	2.0-2.3	1.25	2.5	16-100
6.0	11.0	3.0	1.6	2.4-2.8	1.50	3.0	20-140

Slotted Round Head Wood Screw (DIN96)

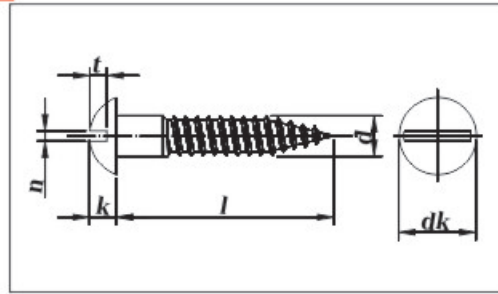


Specification					
d	dk	k	n	t	l
3.0	6	2.1	0.8	1.05-1.35	10-40
3.5	7	2.4	0.8	1.2-1.6	12-50
4.0	8	2.8	1.0	1.4-1.8	12-70
4.5	9	3.1	1.0	1.55-2.0	16-70
5.0	10	3.5	1.2	1.75-2.3	16-100
6.0	12	4.2	1.6	2.1-2.7	20-140

Slotted Countersunk Head Wood Screw (DIN97)

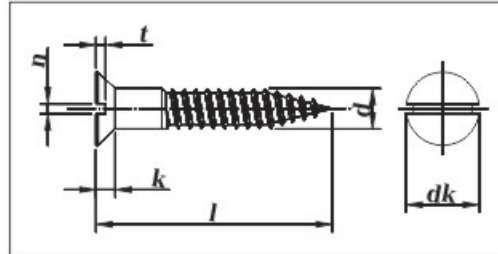


Specification					
d	dk	k	f	t	l
3.0	5.6	1.65	0.75		10-40
3.5	6.5	1.93	0.90		12-50
4.0	7.5	2.2	1.00		12-70
4.5	8.3	2.35	1.10		16-70
5.0	9.2	2.5	1.25		16-100
6.0	11.0	3.0	1.50		20-140

Cross Recessed Oval Countersunk Head Wood Screw (DIN7995)

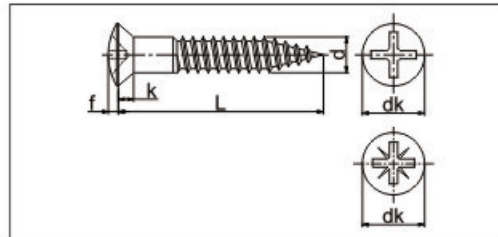



Specification			
d	dk	k	l
3.0	6	2.1	10-40
3.5	7	2.4	12-50
4.0	8	2.8	12-70
4.5	9	3.1	16-70
5.0	10	3.5	16-100
6.0	12	4.2	20-140

Cross Recessed Round Head Wood Screw (DIN7996)

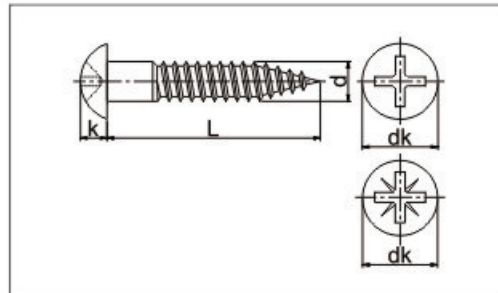


Specification					
d	dk	k	n	t	l
3.0	5.6	1.65	0.8	0.6-0.85	10-40
3.5	6.5	1.93	0.8	0.7-1.0	12-50
4.0	7.5	2.2	1.0	0.8-1.1	12-70
4.5	8.3	2.35	1.0	0.9-1.2	16-70
5.0	9.2	2.5	1.2	1.0-1.3	16-100
6.0	11.0	3.0	1.6	1.2-1.6	20-140

Pan Head Tapping Screw With Slot (DIN7971)

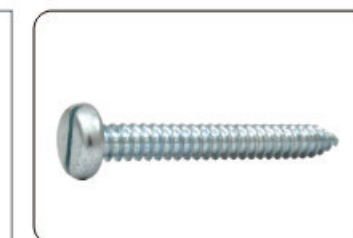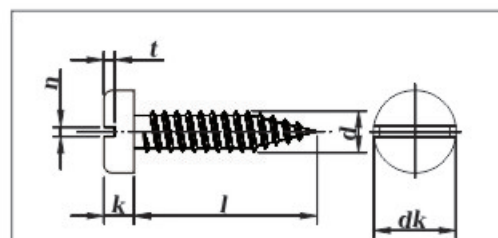



Specification					
d	dk	k	n	t	l
2.9	5.6	1.50	0.8	0.75-1.0	6.5-25
3.5	6.9	1.85	1.0	0.95-1.25	6.5-50
3.9	7.5	2.00	1.0	1.05-1.4	9.5-50
4.2	8.2	2.15	1.2	1.15-1.5	9.5-50
4.8	9.5	2.50	1.2	1.35-1.7	9.5-63
5.5	10.8	2.85	1.6	1.55-1.95	13-75
6.3	12.5	3.20	1.6	1.8-2.2	13-75

Countersunk Head Tapping Screw With Slot (DIN7972)

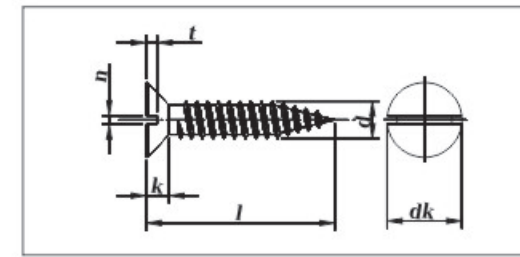



Specification					
d	dk	k	n	t	l
2.9	5.5	1.7	0.8	0.5-0.75	6.5-25
3.5	6.8	2.1	1.0	0.6-0.95	6.5-50
3.9	7.5	2.3	1.0	0.7-1.05	9.5-50
4.2	8.1	2.5	1.2	0.75-1.15	9.5-50
4.8	9.5	3.0	1.2	0.85-1.35	9.5-63
5.5	10.8	3.4	1.6	1.0-1.5	13-75
6.3	12.4	3.8	1.6	1.2-1.75	13-75

Raised Countersunk Head Tapping Screw With Slot (DIN7973)

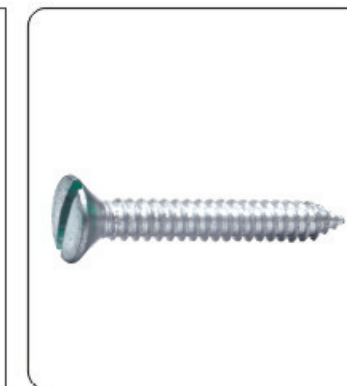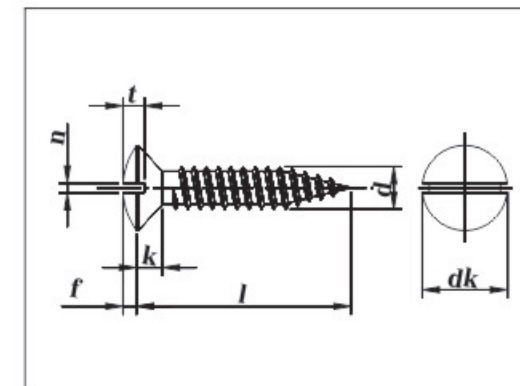



Specification						
d	dk	f	k	n	t	l
2.9	5.5	0.9	1.7	0.8	1.25-1.5	6.5-25
3.5	6.8	1.2	2.1	1.0	1.55-1.9	6.5-50
3.9	7.5	1.3	2.3	1.0	1.7-2.05	9.5-50
4.2	8.1	1.4	2.5	1.2	1.85-2.25	9.5-50
4.8	9.5	1.5	3.0	1.2	2.15-2.6	9.5-63
5.5	10.8	1.7	3.4	1.6	2.45-2.95	13-75
6.3	12.4	2.0	3.8	1.6	2.85-3.45	13-75

Cross Recessed Pan Head Tapping Screw (DIN7981)

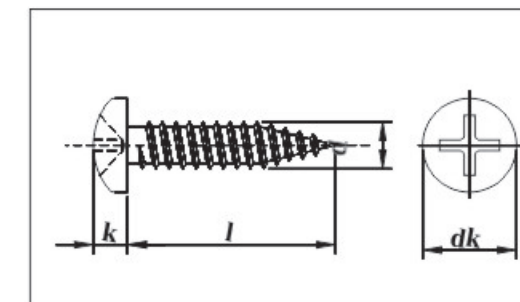


Specification			
d	dk	k	l
2.9	5.6	2.2	6.5-25
3.5	6.9	2.6	6.5-50
3.9	7.5	2.8	9.5-50
4.2	8.2	3.05	9.5-63
4.8	9.5	3.55	9.5-63
5.5	10.8	3.95	13-75
6.3	12.5	4.55	13-75

Cross Recessed Countersunk Head Tapping Screw (DIN7982)

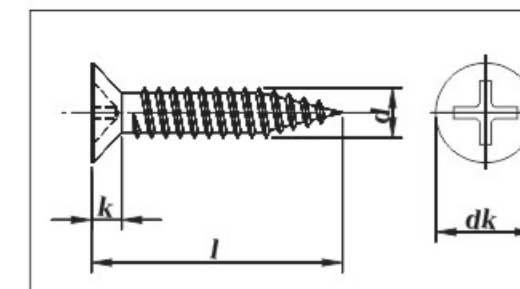


Specification			
d	dk	k	l
2.9	5.5	1.7	6.5-25
3.5	6.8	2.1	6.5-50
3.9	7.5	2.3	9.5-50
4.2	8.1	2.5	9.5-50
4.8	9.5	3.0	9.5-63
5.5	10.8	3.4	13-75
6.3	12.4	3.8	13-75

Cross Recessed Raised Countersunk Head Tapping Screw (DIN7983)


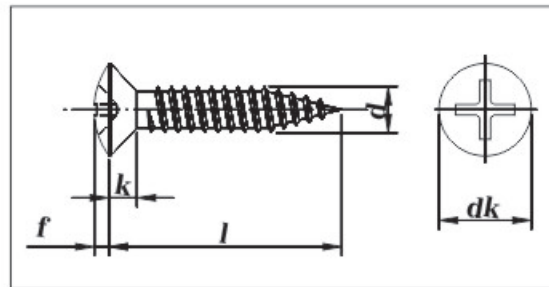


Specification				
d	dk	f	k	l
2.9	5.5	0.9	1.7	6.5-25
3.5	6.8	1.2	2.1	6.5-50
3.9	7.5	1.3	2.3	9.5-50
4.2	8.1	1.4	2.5	9.5-50
4.8	9.5	1.5	3.0	9.5-63
5.5	10.8	1.7	3.4	13-75
6.3	12.4	2.0	3.8	13-75

T25 Torx Drive Pan Head Self-Tapping Screw, Type 17,
With EPDM Bonded Washer, Zinc Plated / Painting RAL Color

Specification 6x100


Hex Washer Head Self Tapping Screw With PVC Washer

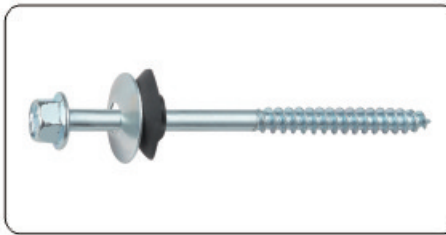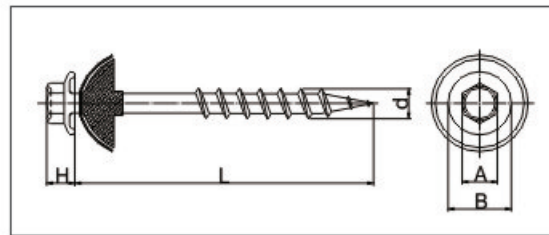

Specification

5/16 x 110mm
5/16 x 130mm
5/16 x 150mm
5/16 x 180mm



Phill Drive Flat Head Cement Screw, With Eight Nibs Under Head

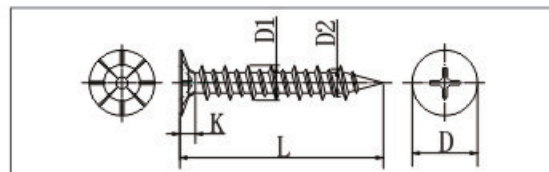

Specification

#8 x 1 1/4
#8 x 1 5/8


Concrete Nail Screw

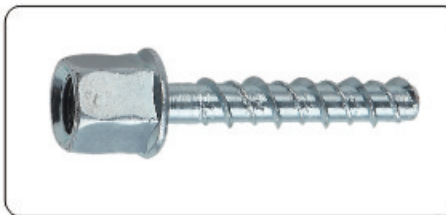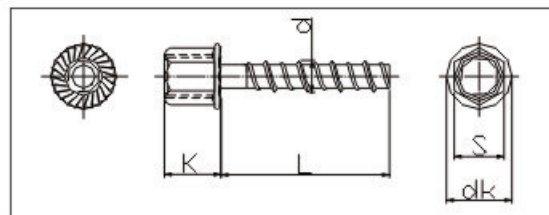

Specification

1/4
3/8



Finishing Nail

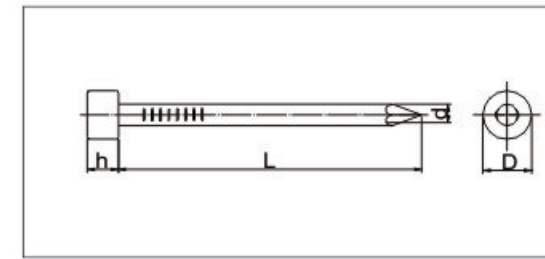

Specification

1.2x20	1.4x30	1.6x30
1.2x25	1.4x35	1.6x35
1.2x30	1.4x40	1.6x40
1.2x35	1.4x45	1.8x30
1.4x25	1.6x25	1.8x40


Nail Screw

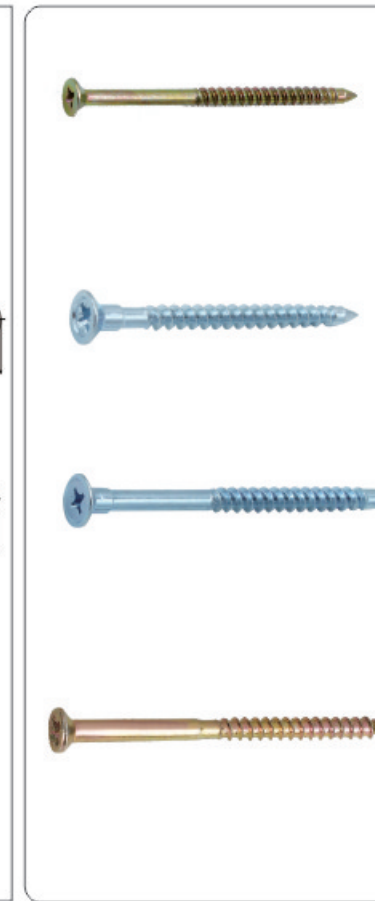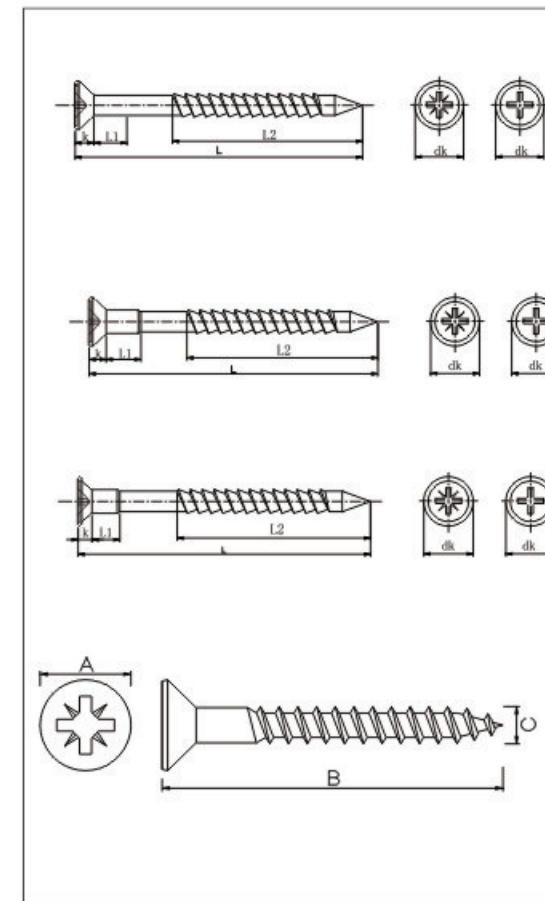

Specification

3.8x38	3.9x45	3.8x45
3.8x45	4.9x50	3.8x64
3.8x65	4.9x55	3.8x84
3.8x85	4.9x65	4.8x105
4.8x50	4.9x85	4.8x125
4.8x65	4.9x105	4.8x145
4.8x85	4.9x125	4.8x165
4.8x105	4.9x125	4.8x64
4.8x125	4.9x145	4.8x84
4.8x145	4.9x165	7x105
4.8x165	3.5x30	7x110
6.8x85	3.5x35	7x125
6.8x105	3.5x40	7x145
6.8x125	3.5x45	7x165
6.8x145	3.5x50	
6.8x165	3.5x55	
6.8x185		
6.8x205		



Hobnail

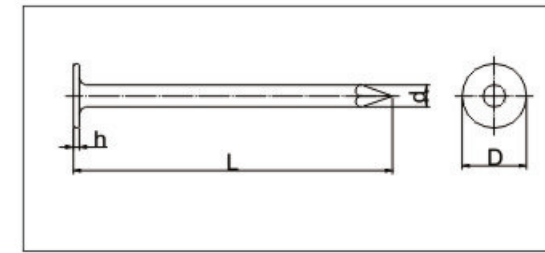

Specification



3.0x20	3.0x50
3.0x25	3.0x60
3.0x30	3.0x70
3.0x35	3.0x80
3.0x40	

Shooting Nail




Specification	
D	L
4.5	30-80
5	80-120

Shooting Nail





Specification	
Item	Size:
DN	22-72

Shooting Nail

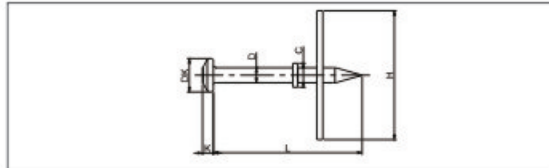


Specification	
Item	Size:
DNW	22-72

Shooting Nail

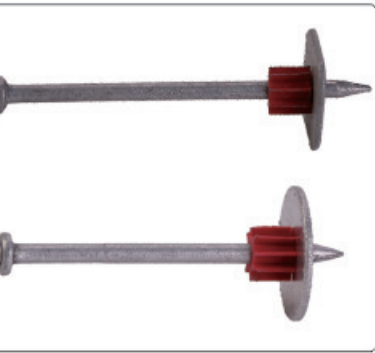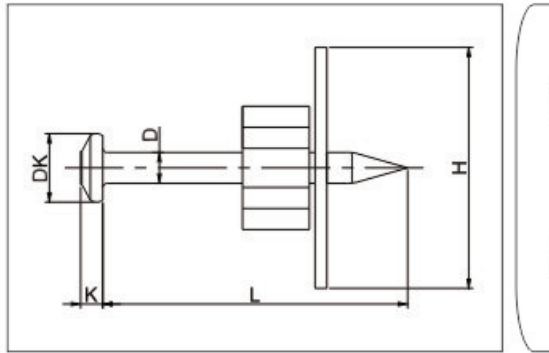


Specification	
Item	Size:
WP300	3"
Item	Size:
WP250	2-1/2"

Shooting Nail

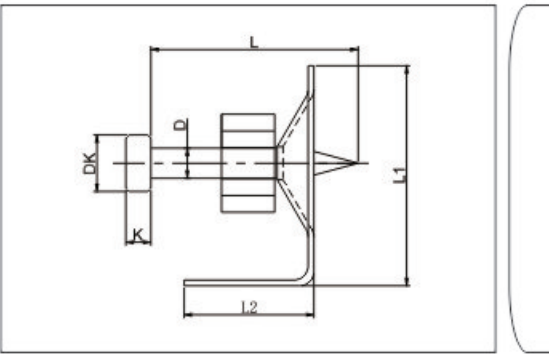


Specification	
Item	Size:
PK	25-32

Shooting Nails

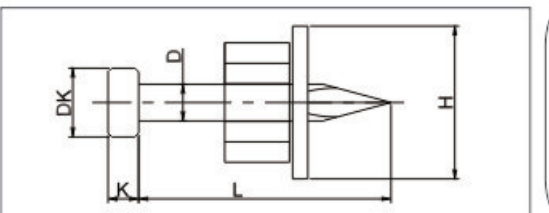



Specification	
Item	Size:
DPW	3/4"-3"

Pozi Head Countersunk/Pan Head Euro Screw

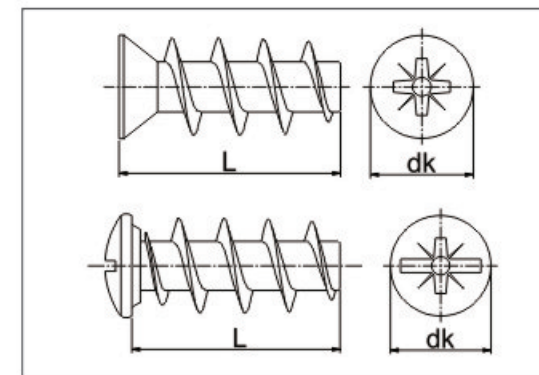



Specification	
4x13	6x13
5x13	6.3x11
5x16	6.3x13
5x20	6.3x20
6x8	6.3x24
6x11	

Flat Head Hex Socket Wood screw

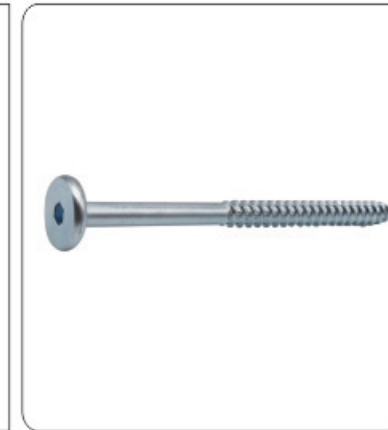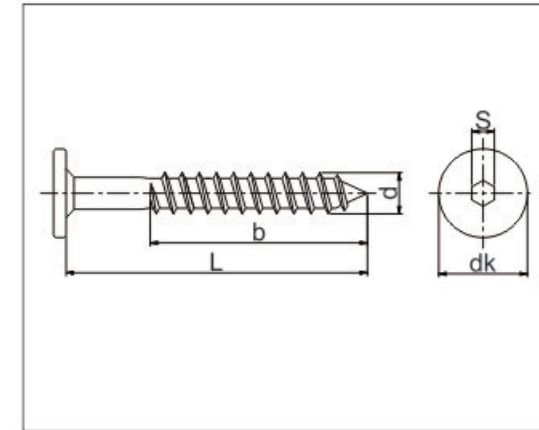

Specification		
6.3x12	6.3x60	6.3x110
6.3x15	6.3x65	6.3x120
6.3x16	6.3x70	6.3x130
6.3x20	6.3x75	6.3x140
6.3x25	6.3x80	6.3x150
6.3x30	6.3x85	6.3x160
6.3x35	6.3x90	6.3x170
6.3x40	6.3x95	6.3x180
6.3x45	6.3x100	6.3x190
6.3x50	6.3x105	6.3x200
6.3x55	6.3x100	


Flat Head Hex Socket Furniture Screw

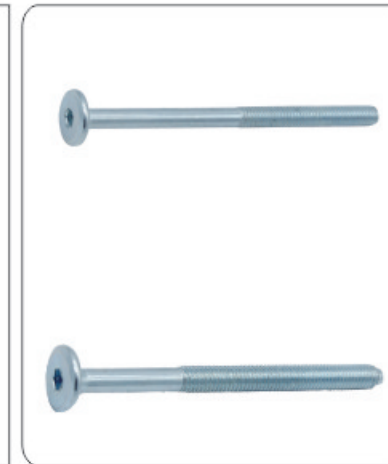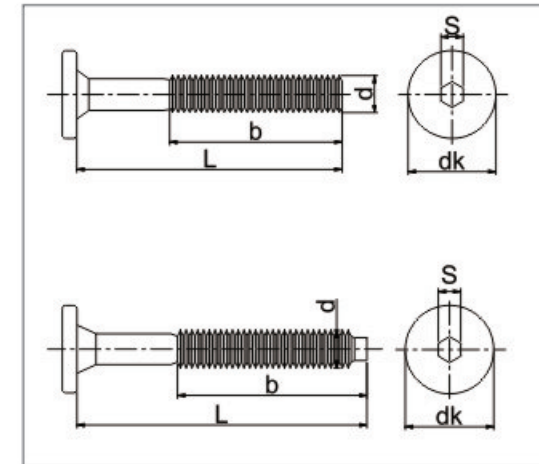

Specification		
6x12	6x60	6x110
6x15	6x65	6x120
6x16	6x70	6x130
6x20	6x75	6x140
6x25	6x80	6x150
6x30	6x85	6x160
6x35	6x90	6x170
6x40	6x95	6x180
6x45	6x100	6x190
6x50	6x105	6x200
6x55	6x100	




Machine Screw (DIN85)

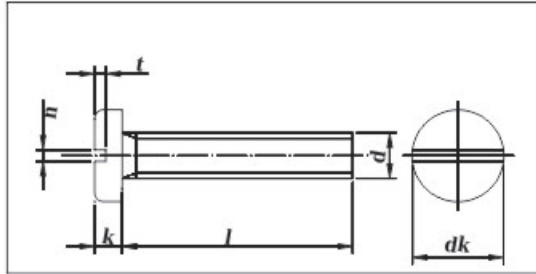


Specification					
d	k	dk	n	t	l
M3	1.8	6	0.8	0.7-0.95	3-40
M4	2.4	8	1.0	1.0-1.3	4-50
M5	3.0	10	1.2	1.2-1.5	6-50
M6	3.6	12	1.6	1.5-1.9	8-50
M8	4.8	16	2.0	1.9-2.4	10-55
M10	6.0	20	2.5	2.4-3.0	12-60

Machine Screw (DIN963)

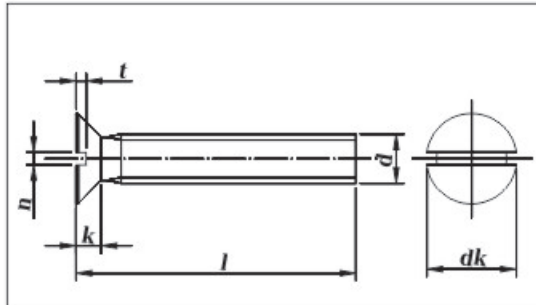


Specification					
d	k	dk	n	t	l
M3	1.65	5.6	0.8	0.6-0.85	3-40
M4	2.2	7.5	1.0	0.8-1.1	4-50
M5	2.5	9.2	1.2	1.0-1.3	6-50
M6	3.0	11	1.6	1.2-1.6	8-50
M8	4.0	14.5	2.0	1.6-2.1	10-55
M10	5.0	18	2.5	2.0-2.6	12-60
M12	6.0	22	3.0	2.4-3.0	20-80

Machine Screw (DIN964)

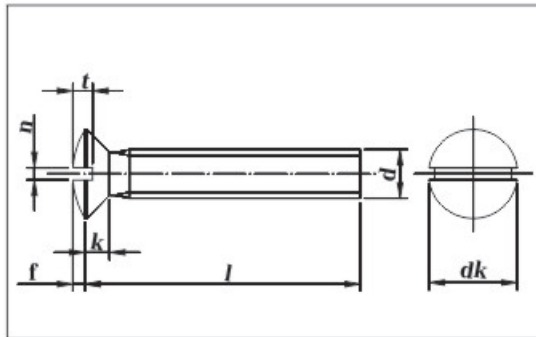


Specification						
d	dk	f	k	n	t	l
M3	5.6	0.75	1.65	0.8	1.2-1.45	3-40
M4	7.5	1.0	2.2	1.0	1.6-1.9	4-50
M5	9.2	1.25	2.5	1.2	2.0-2.3	6-50
M6	11	1.5	3.0	1.6	2.4-2.8	8-50
M8	14.5	2.0	4.0	2.0	3.2-3.7	10-55
M10	18	2.5	5.0	2.5	4.0-4.6	12-60

Machine Screw (DIN7985)

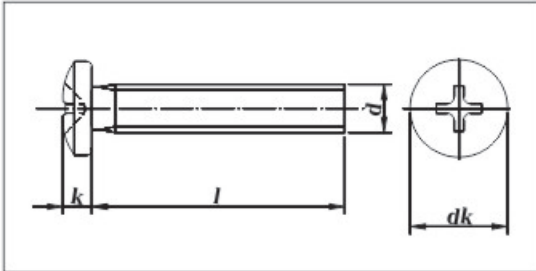

Specification			
d	dk	k	l
M3	6	2.4	5-60
M4	8	3.1	5-100
M5	10	3.8	5-100
M6	12	4.6	8-150
M8	16	6.0	10-150
M10	20	7.5	12-150


Machine Screw (DIN965)

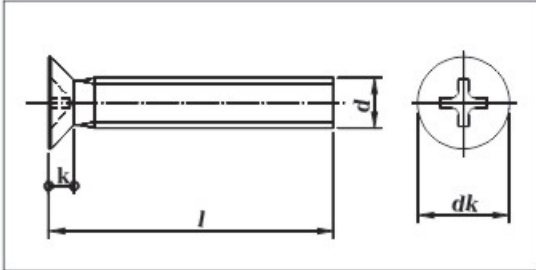

Specification			
d	dk	k	l
M3	5.6	1.65	5-60
M4	7.5	2.2	5-100
M5	9.2	2.5	5-100
M6	11	3.0	8-150
M8	14.5	4.0	10-150
M10	18	5.0	12-150




Machine Screw (DIN966)

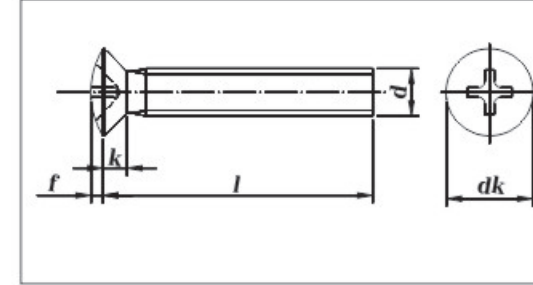


Specification			
d	dk	k	l
M3	5.6	1.65	5-60
M4	7.5	2.2	5-100
M5	9.2	2.5	5-100
M6	11	3.0	8-150
M8	14.5	4.0	10-150
M10	18	5.0	12-150

Machine Screw (DIN84)

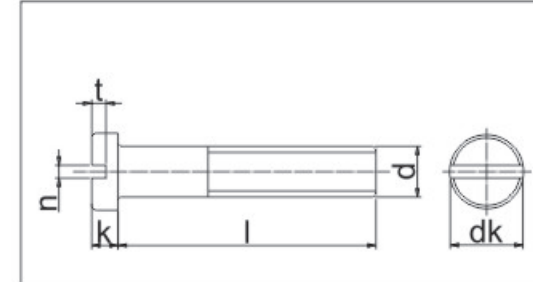


Specification					
d	k	dk	n	t	l
M3	1.8	6	0.8	0.7-0.95	3-40
M4	2.4	8	1.0	1.0-1.3	4-50
M5	3.0	10	1.2	1.2-1.5	6-50
M6	3.6	12	1.6	1.5-1.9	8-50
M8	4.8	16	2.0	1.9-2.4	10-55
M10	6.0	20	2.5	2.4-3.0	12-60

Machine Screw (DIN967)


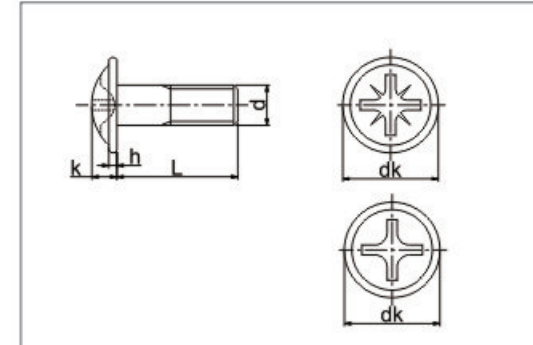


Specification				
d	dk	f	k	l
M3	5.6	0.75	1.65	5-60
M4	7.5	1.0	2.2	5-100
M5	9.2	1.25	2.5	5-100
M6	11	1.5	3.0	8-150
M8	14.5	2.0	4.0	10-150
M10	18	2.5	5.0	12-150



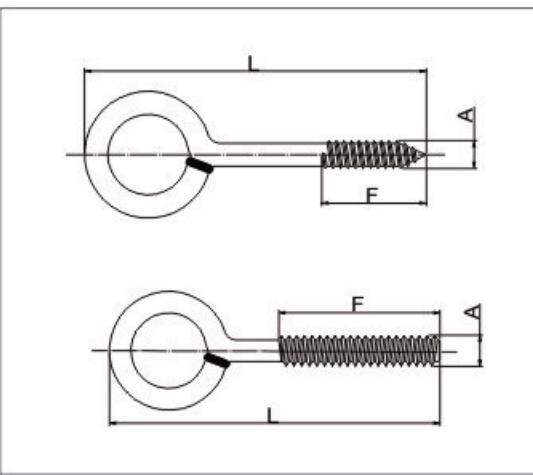
Weld Eye Hook With Wood Thread
Weld Eye Hook With Metric Thread

Specification	
08/080	12/120
08/100	12/160
08/120	12/190
08/160	12/230
10/090	12/260
10/100	12/280
10/120	12/300
10/140	12/320
10/160	12/350
10/190	12/400
12/090	12/450
12/100	12/500


Eye Hook/C Hook Bolt With Metric Thread

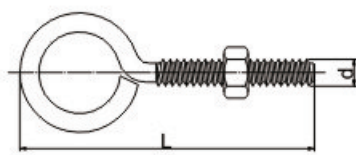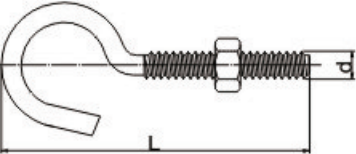 	Specification		
	1/4"-20/1-7/8"	1/4"-20/1-7/8"	5/16"-18/3-1/2"
	1/4"-20/2"	1/4"-20/2"	5/16"-18/4-1/2"
	1/4"-20/3"	1/4"-20/3"	7/16"-14/6"
	1/4"-20/4"	1/4"-20/4"	1/2"-13/1-3/4"
	1/4"-20/5"	1/4"-20/5"	1/2"-13/3-3/4"
	1/4"-20/6"	1/4"-20/6"	1/2"-13/7-3/4"
	5/16"-18/3/4"	5/16"-18/3/4"	1/2"-13/9-3/4"
	5/16"-18/1-3/4"	5/16"-18/1-3/4"	
	5/16"-18/2-1/8"	5/16"-18/2-1/8"	
	5/16"-18/2-1/2"	5/16"-18/2-1/2"	


L、C、O Type Hook Wood Screw / Window Hook Screw

  	Specification		
	3.5 × 15	4.0 × 45	6.0 × 70
	3.5 × 20	4.0 × 60	6.0 × 80
	3.5 × 25	4.0 × 70	6.0 × 100
	3.5 × 30	5.0 × 40	6.0 × 120
	3.5 × 40	5.0 × 50	6.0 × 140
	3.5 × 45	5.0 × 60	8.0 × 80
	4.0 × 16	5.0 × 75	8.0 × 100
	4.0 × 20	5.0 × 85	8.0 × 120
	4.0 × 25	6.0 × 40	8.0 × 140
	4.0 × 35	6.0 × 50	10 × 100
	4.0 × 40	6.0 × 60	10 × 120


J type Hook Roofing Bolt

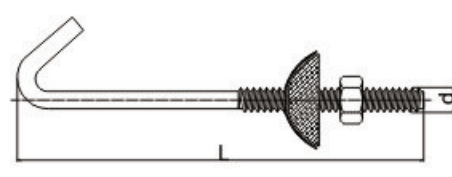 	Specification		
	M5 × 2"-10"		
	M6 × 2"-10"		
	M8 × 2"-10"		
	1/4 × 2"-10"		


Straight Bar Roofing Bolt

 	Specification		
	8 × 250		
	8 × 300		
	8 × 400		


Straight Bar Roofing Bolt

 	Specification		
	7 × 250		
	7 × 300		
	7 × 400		


J Hook Roofing Bolt

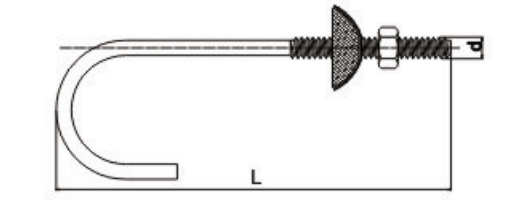 	Specification		
	M5 × 4"-10"		
	M6 × 4"-10"		
	M8 × 4"-10"		
	1/4 × 4"-10"		


Ruff Stud Yellow Zinc Plated With EPDM Bonded Washer

 	Specification		
	3/16 × 2"-16"		
	1/4 × 2"-16"		

Roofing Screw With Bonded Washer

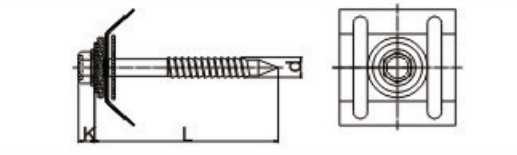
 	Specification		
	6X60		
	6X80		
	8X80		

Square Hook Roofing Bolt

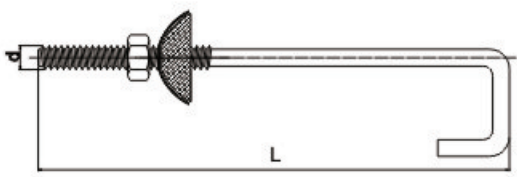 	Specification		
	M5 × 4"-10"		
	M6 × 4"-10"		
	M8 × 4"-10"		
	1/4 × 4"-10"		




Hexagonal Nut
DIN934/ISO4032/SAE J995
Gr.4/6/8/10, Gr.2/5/8

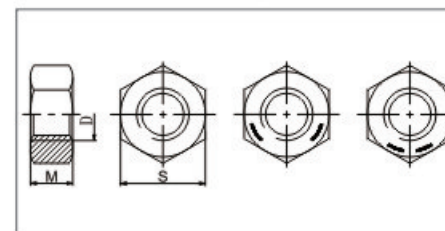


Specification		
D	s	m
M3	5.5	2.4
M4	7	3.2
M5	8	4.0
M6	10	5.0
M8	13	6.3
M10	17	8.0
M12	19	10.0
M14	22	11.0
M16	24	13.0
M20	30	16.0
M24	36	19.0
M30	46	24.0
M36	55	29.0
M42	65	34.0
M48	75	38.0
M56	85	45.0
M64	95	51.0
M72	105	58.0

Hexagonal Slotted Nut
(DIN935)

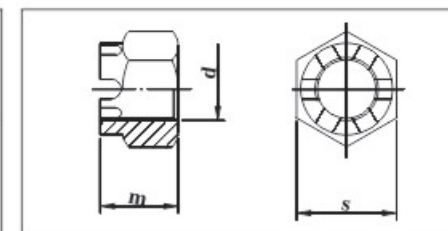


Specification		
D	s	m
M6	10	7.5
M8	13	9.5
M10	17	12
M12	19	15
M14	22	16
M16	24	19
M18	27	21
M20	30	22
M22	32	26
M24	36	27
M27	41	30
M30	46	33
M33	50	35
M36	55	38
M42	65	46

Hexagonal Nut With Flange
(DIN6923)

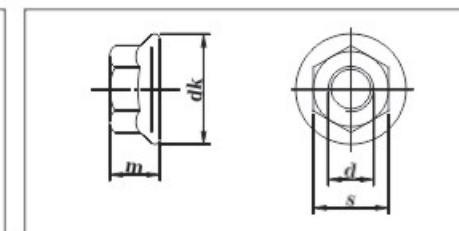


Specification			
d	s	m	dk
M5	8	5	11.8
M6	10	6	14.2
M8	13	8	17.9
M10	15	10	21.8
M12	18	12	26.0
M14	21	14	29.9
M16	24	16	34.5
M20	30	20	42.8

Heavy Hex Nut ASTM A194/ASTM A563 Gr.2H, Gr.A/B/D/DH

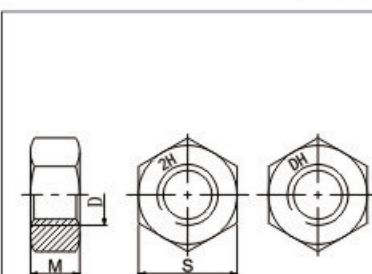


Specification			
1/4	7/8	1 7/8	3 3/4
5/16	1	2	4
3/8	1 1/8	2 1/4	4 1/2
7/16	1 1/4	2 1/2	5
1/2	1 3/8	2 3/4	
9/16	1 1/2	3	
5/8	1 5/8	3 1/4	
3/4	1 3/4	3 1/2	

Steel Lock Hexagonal Nut
With Nylon Insert(DIN985)
Grade 4/6/8




Specification		
d	H	s
M5	5	8
M6	6	10
M8	8	13
M10	10	17
M12	12	19
M14	14	22
M16	16	24
M20	20	30
M24	24	36

Cap Nut
(DIN1587)




Specification				
d	h	m max	s	
M3	7	2.4	5.5	
M4	8	3.2	7	
M5	10	4.0	8	
M6	12	5.0	10	
M8	15	6.5	13	
M10	18	8.0	17	
M12	22	10	19	
M14	25	11	22	
M16	28	13	24	
M20	34	16	30	

Wing Nut
(DIN315)




Specification						
d	d1	e	g	h	m	
M4	6	18	1.7	8.5	3.2	
M5	8	24	2.3	11	4.0	
M6	10	30	2.7	15	5.0	
M8	13	36	3.6	18	6.5	
M10	17	48	4.6	23	8.0	
M12	20	62	5.6	31	10.0	
M16	26	70	6.5	35	13.0	
M20	32	86	7.0	44	16.0	
M24	41	106	8.6	53.5	20.0	

Square Nut
(DIN557)





Specification		
d	s	m
M5	8	4
M6	10	5
M8	13	6.5
M10	16	8
M12	18	10
M16	24	13
M20	30	16

Channel Nut / Spring Nut

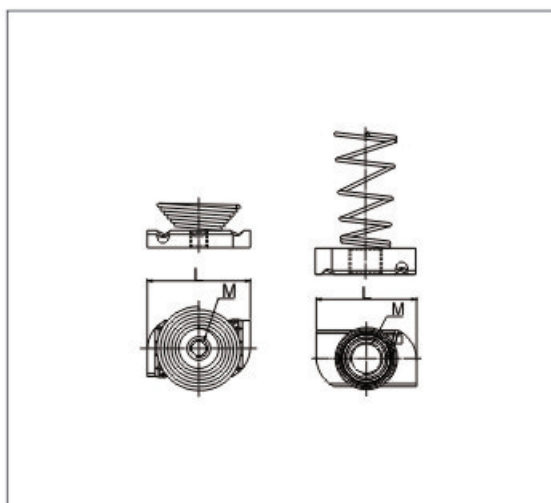


Specification	
1/4X34.5X19X6	M6X34.5X19X6
5/16X34.5X19X6	M8X34.5X19X6
3/8X34.5X19X8	M8X34.5X19X8
7/16X34.5X19X8	M10X34.5X19X8
3/8X34.5X19X9.2	M10X34.5X19X9
1/2X34.5X19X9.2	M12X34.5X19X8
1/2X34.5X19X12	M12X34.5X19X9
5/8X34.5X30X11	
3/4X34.5X30X11	
7/8X34.5X30X11	

Square Nut
(DIN562)




Specification		
d	s	m
M2	4.0	1.2
M3	5.5	1.8
M4	7.0	2.2
M5	8.0	2.7
M6	10	3.2
M8	13	4.0
M10	17	5.0

Square Weld Nut
(DIN928)




Specification		
d	s	m
M4	7	3.5
M5	9	4.2
M6	10	5.0
M8	14	6.5
M10	17	8.0
M12	19	10.0

Hexagonal Weld Nut
(DIN929)





Specification		
d	s	m
M3	7.5	3.0
M4	9	3.5
M5	10	4.0
M6	11	5.0
M8	14	6.5
M10	17	8.0
M12	19	10.0
M14	22	11.0
M16	24	13.0

Hexagonal Coupling Nut
(DIN6334)




Specification		
M4x7x12	M12x19x36	M22x33x66
M5x8x15	M12x17x40*	M24x36x50*
M6x10x18	M14x22x42	M27x41x81
M6x10x20*	M16x22x50*	M30x46x90
M8x13x24	M16x24x48	M36x55x108
M8x13x25*	M18x27x54	M42x65x126
M10x17x30	M20x30x60	M48x70x144

Metal Lock Nut DIN980
Grade 6/8/10

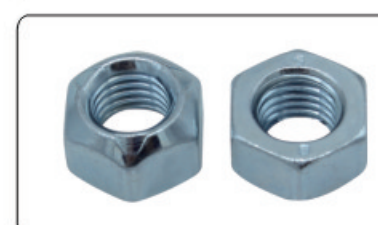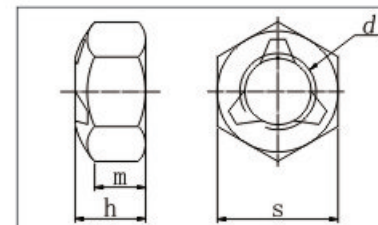


Specification	
M6	M14
M8	M16
M10	M18
M12	M20

Hex Thin Nut DIN936/DIN439
Grade 6

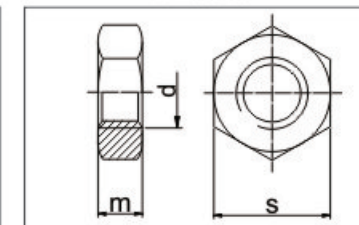

Specification	
M6	M20
M8	M22
M10	M24
M12	M27
M14	M30
M16	M36
M18	


Rivet Nut

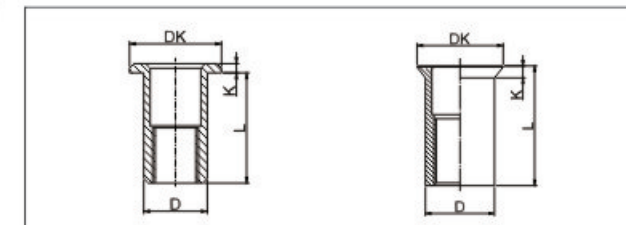

Specification	
M3	M8
M4	M10
M5	M12
M6	



Thread Rods DIN975/976/ASTM A307 Gr.4.8/6.8/8.8/10.9, Gr.A/B

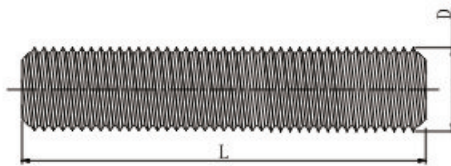				Specification				Specification			
d		d		d		d		d		d	
M3	1000-3000	M22	1000-3000	1/8	1000-3000	3/4	1000-3000	5/32	1000-3000	7/8	1000-3000
M4	1000-3000	M24	1000-3000	3/16	1000-3000	1	1000-3000	10-24	1000-3000	11/8	1000-3000
M5	1000-3000	M27	1000-3000	1/4	1000-3000	11/4	1000-3000	5/16	1000-3000	13/8	1000-3000
M6	1000-3000	M30	1000-3000	3/8	1000-3000	11/2	1000-3000	7/16	1000-3000	13/4	1000-3000
M8	1000-3000	M33	1000-3000	1/2	1000-3000	17/8	1000-3000	M16	1000-3000	M48	1000-3000
M10	1000-3000	M36	1000-3000	9/16	1000-3000	2	1000-3000	M18	1000-3000	M52	1000-3000
M12	1000-3000	M39	1000-3000	5/8	1000-3000			M20	1000-3000	M56	1000-3000
M14	1000-3000	M42	1000-3000								
M16	1000-3000										
M18	1000-3000										
M20	1000-3000										


Stud Bolt ASTM A193/ASTM A320 Gr.B7/B7M/B16, Gr.L7/L7M

Specification					
size	Pitch			L1	L2
	UNC	UNF	UNS		
1/4	20	28	/	1"-36"	3/6"/12'
5/16	18	24	/	1"-36"	3/6"/12'
3/8	16	24	/	1"-36"	3/6"/12'
7/16	14	20	/	1"-36"	3/6"/12'
1/2	13	20	/	1"-36"	3/6"/12'
9/16	12	18	/	1"-36"	3/6"/12'
5/8	11	18	/	1"-36"	3/6"/12'
3/4	10	16	/	1"-36"	3/6"/12'
7/8	9	14	/	1"-36"	3/6"/12'
1	8	12	8	1"-36"	3/6"/12'
1 1/8	7	12	8	1"-36"	3/6"/12'
1 1/4	7	12	8	1"-36"	3/6"/12'
1 3/8	6	12	8	1"-36"	3/6"/12'
1 1/2	6	12	8	1"-36"	3/6"/12'
1 3/4	5	/	8	1"-36"	3/6"/12'
2	4.5	/	8	1"-36"	3/6"/12'
2 1/4	4.5	/	8	1"-36"	3/6"/12'
2 1/2	4	/	8	1"-36"	3/6"/12'
2 3/4	4	/	8	1"-36"	3/6"/12'
3	4	/	8	1"-36"	3/6"/12'
3 1/4	4	/	8	1"-36"	3/6"/12'
3 1/2	4	/	8	1"-36"	3/6"/12'
3 3/4	4	/	8	1"-36"	3/6"/12'
4	4	/	8	1"-36"	3/6"/12'


Double Ended Stud Bolt DIN939




Hexagonal Head Bolt DIN933 / ISO4017 Grade: 4.8/6.8/8.8/10.9/12.9

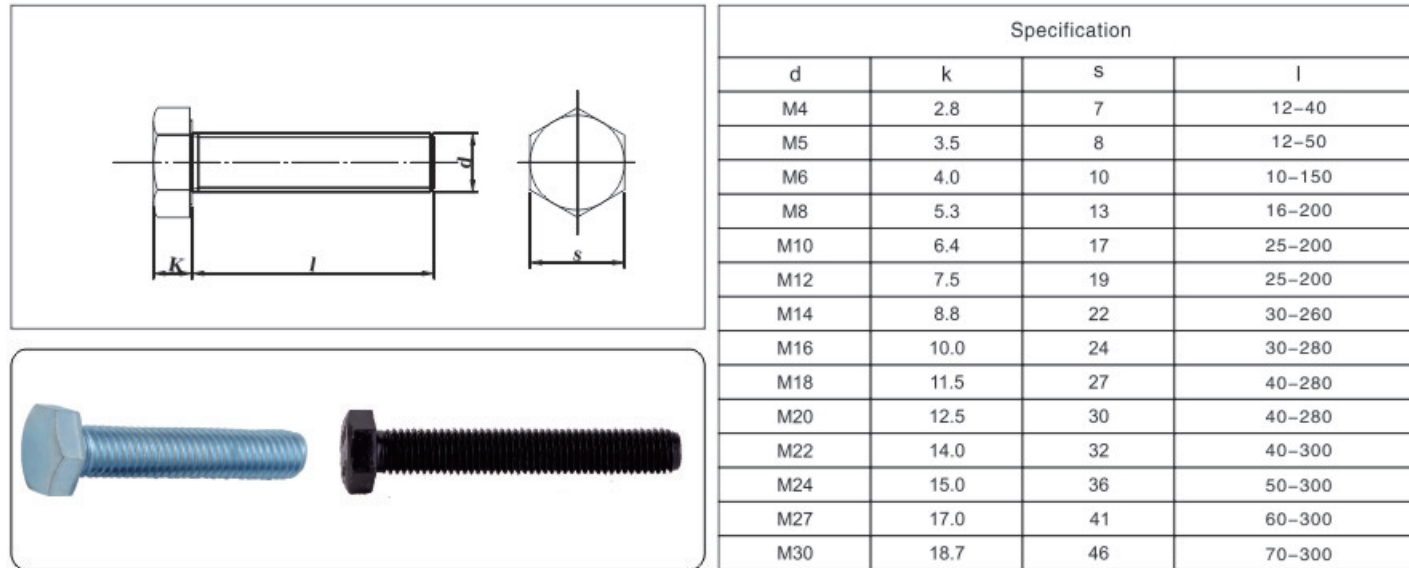


Hexagonal Head Bolt DIN931 / ISO4014 Grade: 4.8/6.8/8.8/10.9/12.9

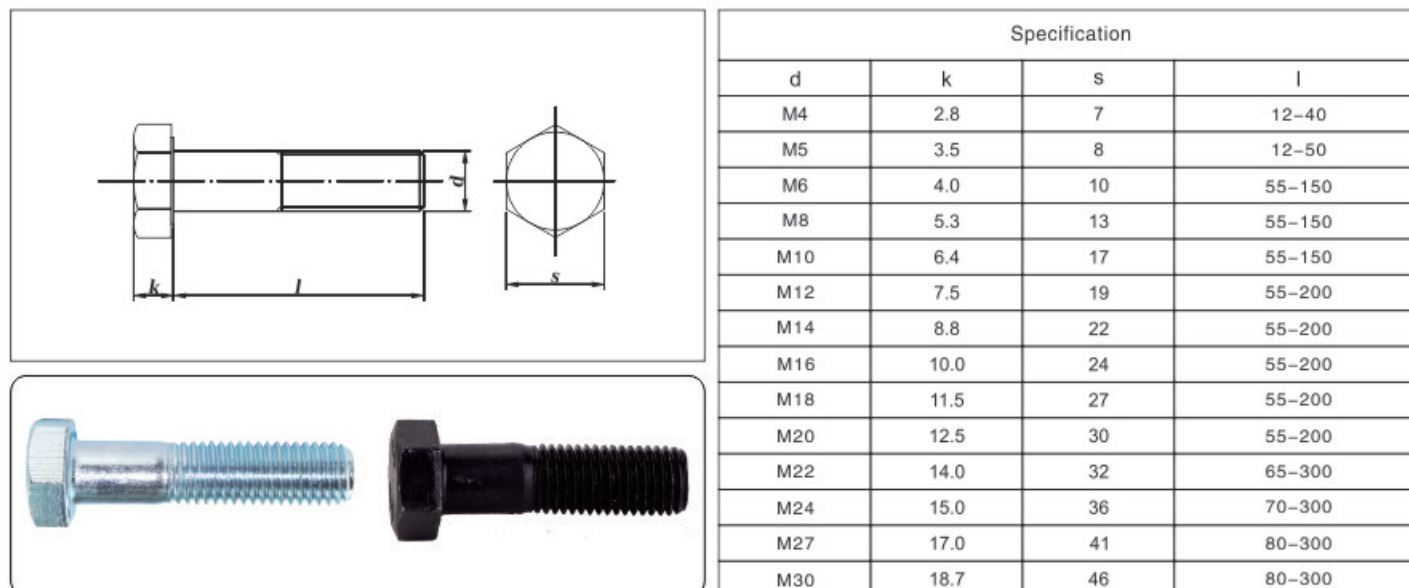


Hex Bolt SAE J429/ASTM A307/ASTM A449/ASTM A354 Gr.2/Gr.5/Gr.8,Gr.A,Ty.1,Gr.BC/Gr.BD

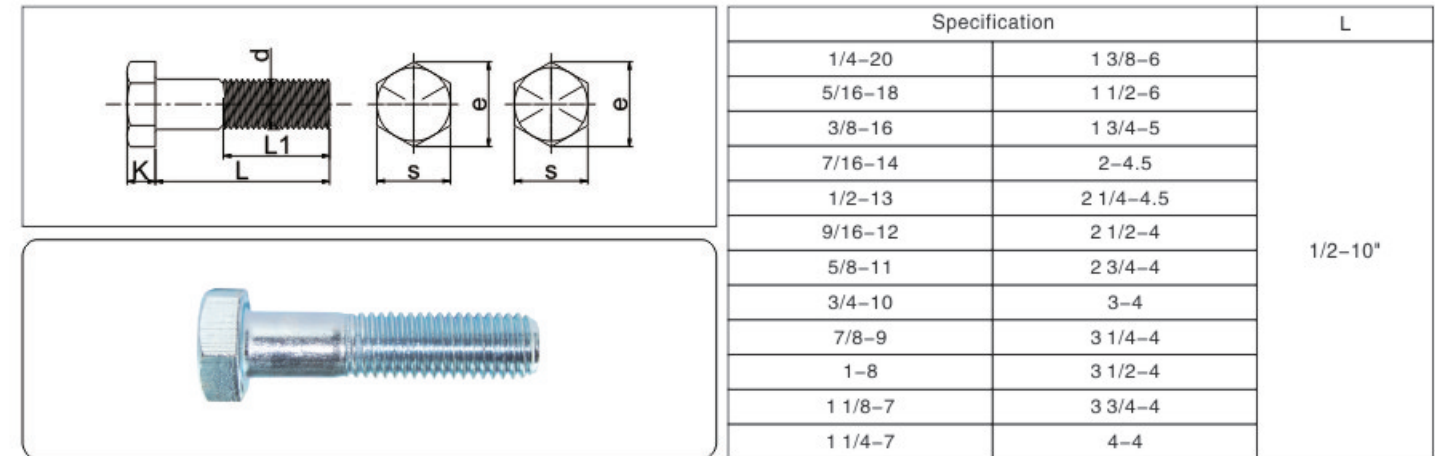


Hex Bolt ASTM A325 / ASTM A490 Ty. 1

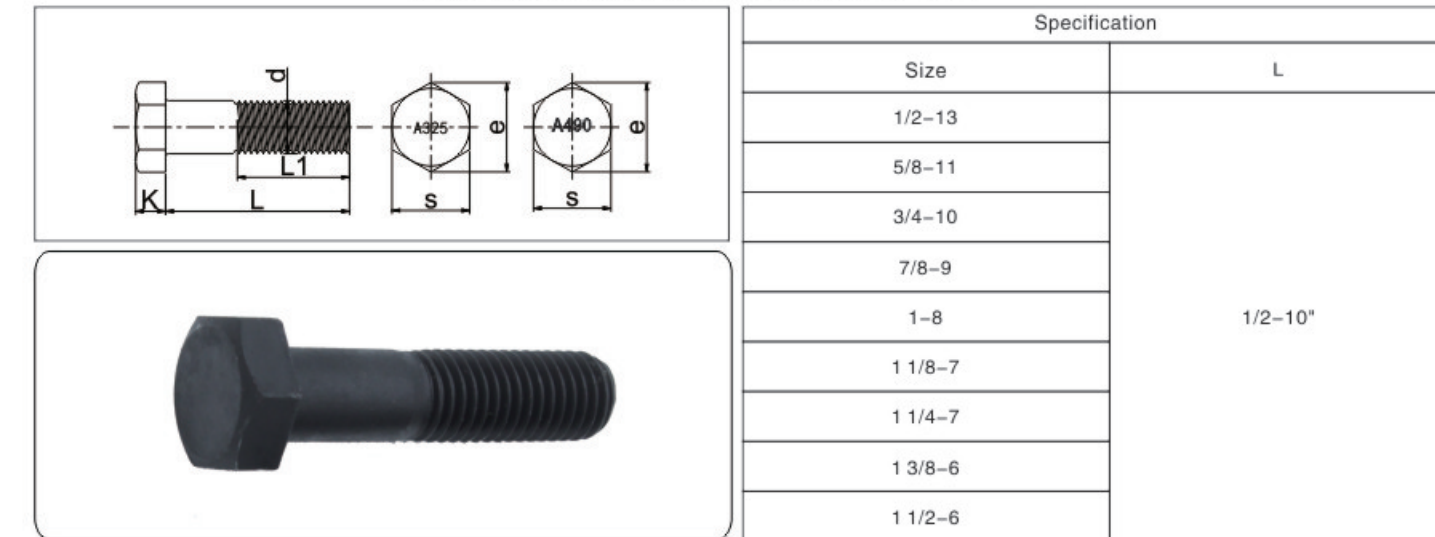

Hexagonal Socket Head Bolt (DIN912)

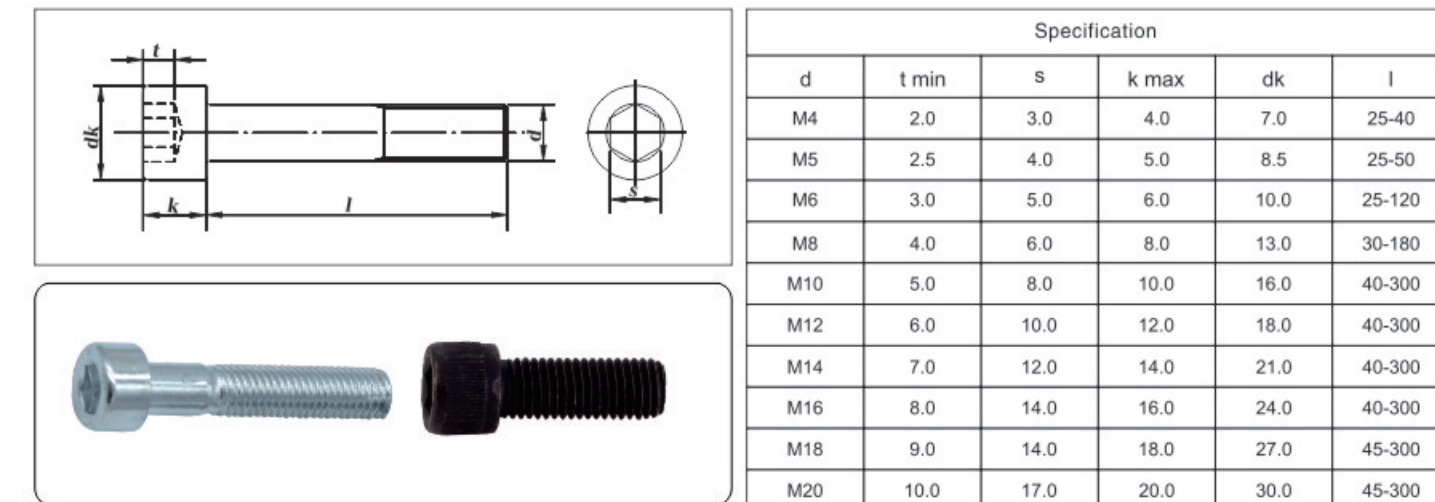


Carriage Bolt With Mushroom Head And Square Neck(DIN603)

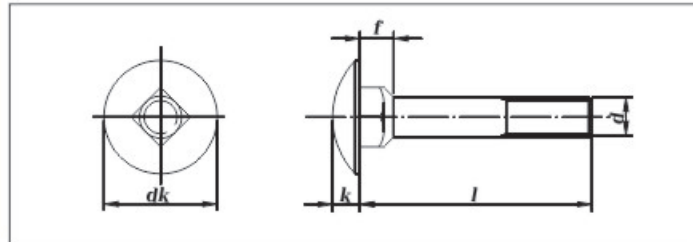


Specification				
d	dk	k	f	l
M5	13.55	3.30	4.10	10-120
M6	16.55	3.88	4.60	10-230
M8	20.65	4.88	5.60	16-300
M10	24.65	5.38	6.60	20-300
M12	30.65	6.95	8.75	20-300
M16	38.80	8.95	12.9	30-300

Carriage Bolt DIN607 Grade 4.8 / 8.8

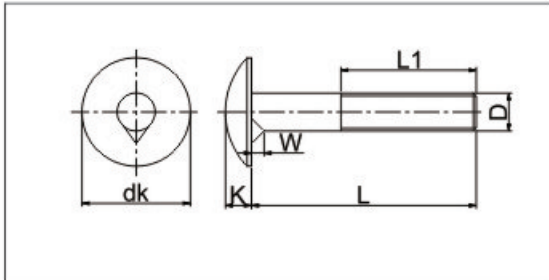


Specification	
D	L
6	16-150
8	16-200
10	20-200
12	30-200
14	30-200
16	35-200
18	40-180
20	40-180

Countersunk Head Square Neck Bolt DIN608 Grade 4.8 / 8.8

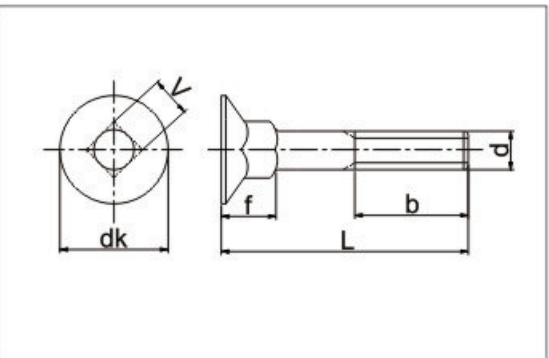

Specification	
D	L
6	16-150
8	16-200
10	20-200
12	30-200
14	30-200
16	35-200
18	40-180
20	40-180

Carriage Bolt 307A

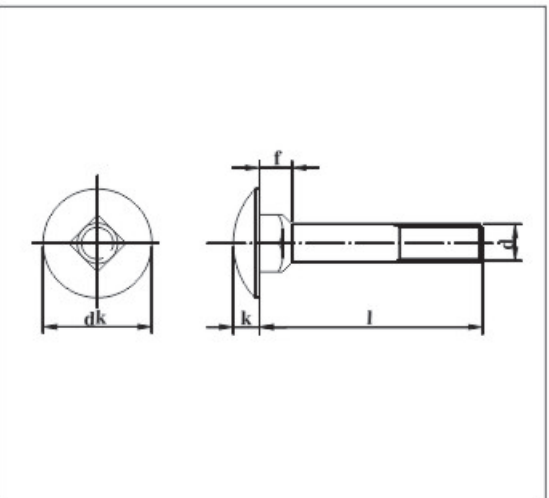


Specification	
D	L
1/4	1/2-12"
5/16	
3/8	
7/16	
1/2	
5/8	
3/4	
7/8	
1-1/8	
1-1/4	
1-3/8	

Washers







Flat Washer
(DIN440)




Flat Washer
(DIN125/DIN126)




Flat Washer
(DIN9021)



Spring Washer
(DIN127B)




Spring Washer
(DIN7980)



Specifications(mm)	Size	d	D	s	Size	d	D	s	Size	d	D	s	size	d	D	s
M5	M3	3.2	7	0.5	M3	3.2	9	0.8	M3	3.4	6.2	0.8	M3	3.1	5.6	1.0
M6	M4	4.3	9	0.8	M4	4.3	12	1.0	M4	4.4	7.6	0.9	M4	4.1	7.0	1.2
M8	M5	5.3	10	1.0	M5	5.3	15	1.2	M5	5.4	9.2	1.2	M5	5.1	8.8	1.6
M10	M6	6.4	12	1.6	M6	6.4	18	1.6	M6	6.5	11.8	1.6	M6	6.1	9.9	1.6
M12	M8	8.4	16	1.6	M8	8.4	24	2.0	M8	8.5	14.8	2.0	M8	8.1	12.7	2.0
M14	M10	10.5	20	2.0	M10	10.5	30	2.5	M10	10.7	18.1	2.2	M10	10.2	16	2.5
M16	M12	13	24	2.5	M12	13	37	3.0	M12	12.7	21.1	2.5	M12	12.2	18	2.5
M20	M14	15	28	2.5	M14	15	44	3.0	M14	14.7	24.1	3.0	M14	14.2	21.1	3.0
M23	M16	17	30	3.0	M16	17	50	3.0	M16	17	27.4	3.5	M16	16.2	24.4	3.5
M24	M18	19	34	3.0	M18	20	56	4.0	M18	19	29.4	3.5	M18	18.2	26.4	3.5
M27	M20	21	37	3.0	M20	22	60	4.0	M20	21.2	33.6	4.0	M20	20.2	30.6	4.5
M30	M22	23	39	3.0	M22	24	66	5.0	M22	23.5	35.9	4.0	M22	22.5	32.9	4.5
M33	M24	25	44	4.0	M24	26	72	5.0	M24	25.5	40	5.0	M24	24.5	35.9	5.0
M36	M27	28	50	4.0	M27	30	85	6.0	M27	28.5	43	5.0	M27	27.5	38.9	5.0
	M30	31	56	4.0	M30	33	92	6.0	M30	31.7	48.2	6.0	M30	30.5	44.1	6.0
	M33	34	60	5.0	M33	36	105	6.0	M36	37.7	58.2	6.0	M33	33.5	47.1	6.0
	M36	37	66	5.0	M36	39	110	8.0	M42	43.7	68.2	7.0	M36	36.5	52.2	7.0


EPDM Bonded Washer



Specification

(2.0+0.5)x14	(2.5+0.5)x14	(2.5+0.8)x14
(2.0+0.5)x16	(2.5+0.5)x16	(2.5+0.8)x16
(2.0+0.5)x19	(2.5+0.5)x19	(2.5+0.8)x19


BAZ EPDM Washer



Specification

22x10.5mm

EPDM Washer



Specification



10.5x0.3 mm

Anchors






Sleeve Anchor With Flanged Nut / Sleeve Anchor With Hex Nut

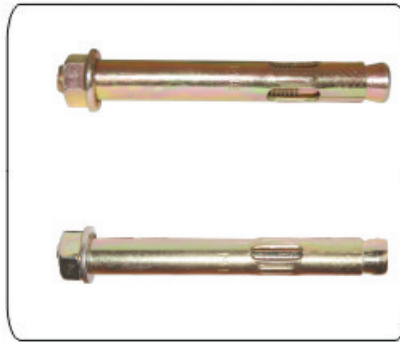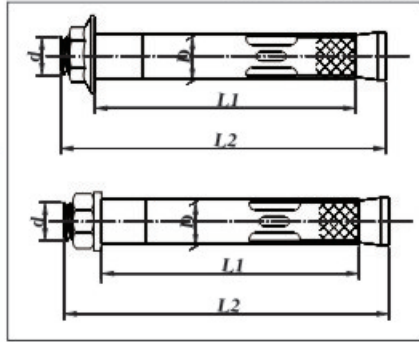

Specification		
d	D	L
6	M8	40-140
8	M10	40-180
10	M12	60-300
12	M14	60-200
12	M16	65-250
16	M20	75-300


Sleeve Anchor With Hex Bolt / Sleeve Anchor With C, O, L Hook Bolt

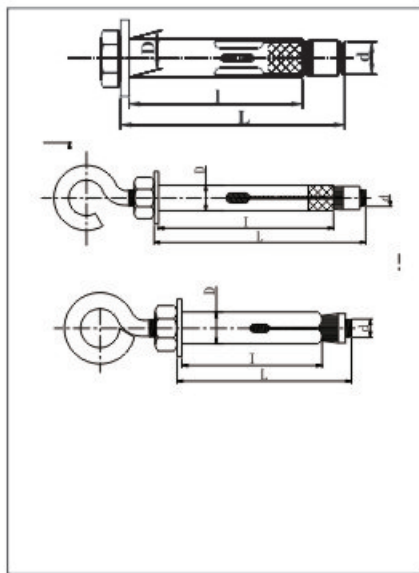

Specification		
d	D	L
6	M8	45-100
8	M10	50-140
10	M12	65-150
12	M14	80-150
12	M16	80-150
16	M20	100-200


Wedge Anchor (Carbon Steel)
Wedge Anchor (Stainless Steel)

Wedge Anchor (Carbon Steel Body With 304 Stainless Steel Ring)

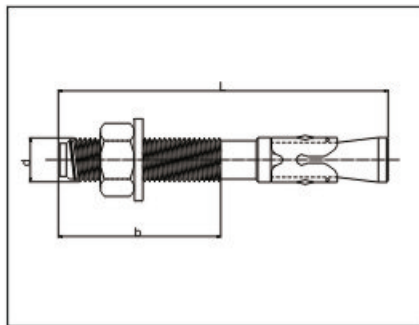

Specification	
D	L
M6	40-95
M8	50-120
M10	50-150
M12	80-200
M16	80-300
M20	100-300
M24	100-400



Chemical Anchor

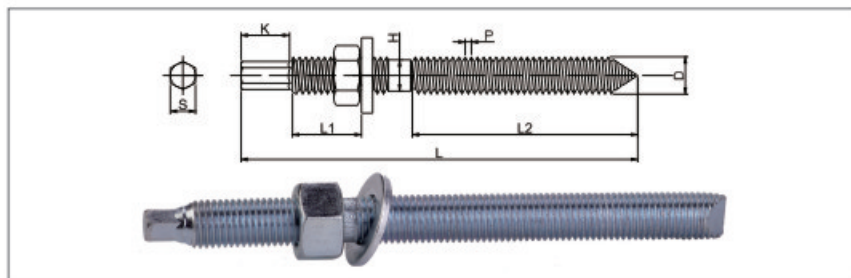

Specification	
M8x110	M20x260
M10x130	M22x280
M12x160	M24x300
M14x180	M27x330
M16x190	M30x380
M18x230	





Double Sleeve Anchor With Hex Bolt

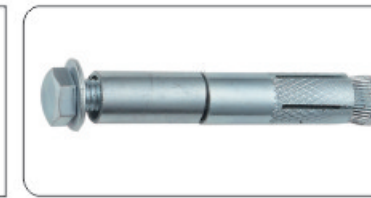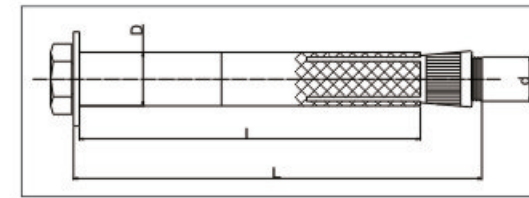


Specification		
1/4"-20 x 2"	3/8"-16 x 3 1/2"	3/4"-10 x 4 1/2"
1/4"-20 x 3"	1/2"-13 x 3"	3/4"-10 x 6 1/2"
5/16"-18 x 2 1/4"	1/2"-13 x 4 1/2"	1"-8 x 6"
5/16"-18 x 3 1/4"	5/8"-11 x 3 1/2"	1"-8 x 9"
3/8"-16 x 2 1/2"	5/8"-11 x 5"	

Sleeve Anchor With Hex Bolt With(DIN9021)

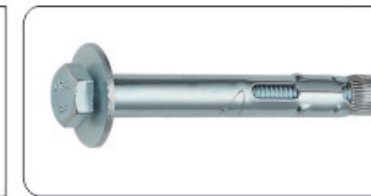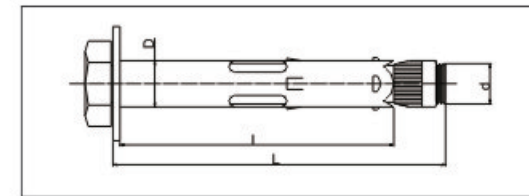


Specification		
M6x8x45	M8x10x100	M10x14x70
M6x8x70	M8x10x140	M10x14x100
M6x8x90	M10x12x65	M12x16x75
M8x10x55	M10x12x80	M12x16x110
M8x10x80	M10x12x120	

Sleeve Anchor With DIN7991 Countersunk Bolt

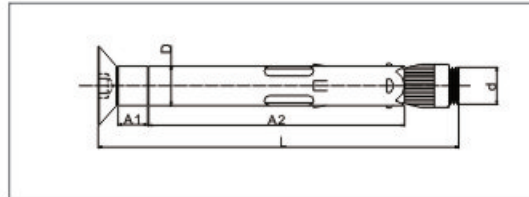


Specification	
M8 x 10 x 60	
M8 x 10 x 80	
M10 x 12 x 100	

Sleeve Anchor

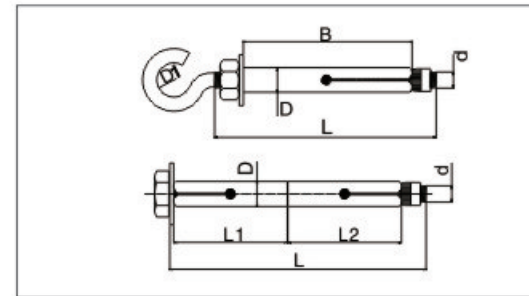

Specification	
1/4	
5/16	
3/8	
1/2	


Metal Frame Anchor
Hollow Metal Frame Anchor

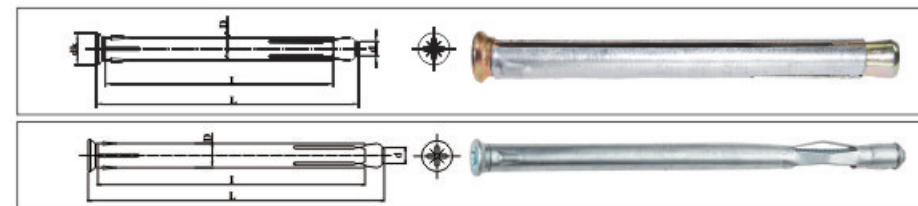

Specification	
D	L
8	72-172
10	72-202




Hollow Wall Anchor



Specification

Size	d	D	L
M4X20	M4	7	20
M4X25	M4	7	25
M4X32	M4	7	32
M4X38	M4	7	38
M4X46	M4	7	46
M4X54	M4	7	54
M4X59	M4	7	59
M5X37	M5	9	37
M5X45	M5	9	45
M5X52	M5	9	52
M5X65	M5	9	65
M5X80	M5	9	80
M6X37	M6	11	37
M6X45	M6	11	45
M6X52	M6	11	52
M6X65	M6	11	65
M6X80	M6	11	80

Bolt Anchor


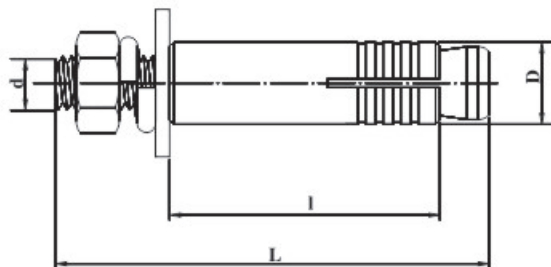


Specification

Size	d	L	D	l	Pull Out (Kgs)
1/4X50	1/4-20	50	9.5	30	890
5/16X65	5/16-18	65	12	35	1390
3/8X75	3/8-16	75	14	40	1600
1/2X100	1/2-13	100	16.6	50	2540
5/8X100	5/8-11	100	21.7	50	3300
5/8X125	5/8-11	125	21.7	60	3300
3/4X160	3/4-10	160	25.4	80	4950



Hit Anchor

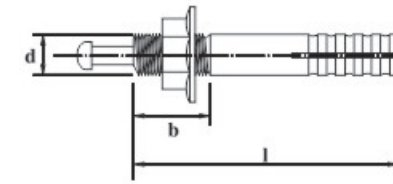


Specification

Size	d	L	b	Pull Out (Kgs)
M6x40	M6	40	15	450
M6x50	M6	50	20	450
M6x60	M6	60	20	450
M8x50	M8	50	20	900
M8x60	M8	60	20	900
M8x70	M8	70	25	900
M10x50	M10	50	20	1300

Specification

Size	d	L	b	Pull Out (Kgs)
M10x60	M10	60	20	1300
M10x70	M10	70	25	1300
M10x80	M10	80	25	1300
M10x90	M10	90	25	1300
M10x100	M10	100	30	1300
M10x120	M10	120	30	1300
M12x80	M12	80	30	1600
M12x90	M12	90	30	1600
M12x100	M12	100	30	1600
M12x120	M12	120	50	1600
M16x100	M16	100	40	2600
M16x150	M16	150	40	2600
M20x150	M20	150	50	3000
M20x190	M20	190	50	3000


Ceiling Anchor



Specification

Size	L	Max Fast Thickness	Pcs/Box/Ctn
6X40	40	5	300
6X60	60	35	200



Drop In Anchor

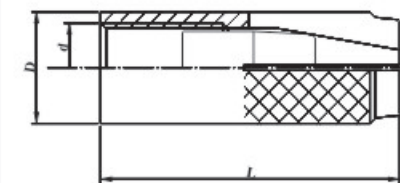

Specification

Size	d	D	L	Pull Out(kgs)
M6	M6	8	25	950
M8	M8	10	30	1350
M10	M10	12	40	1950
M12	M12	16	50	2900
M16	M16	20	65	4850
M20	M20	25	80	5900

Brass / Copper Drop In Anchor

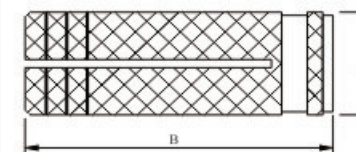


Specification

Size	Pull Out (Kgs)
M4x5.5x15	M8x10x30
M5x6.5x22	M10x12x32
M6x8x24	M12x15x40
	M12x16x38
	M16x18x45




Universal Metal Plug

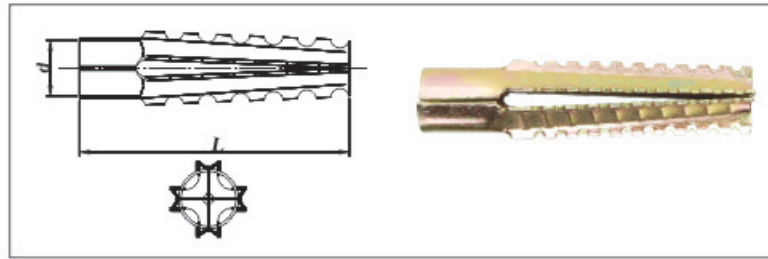


Specification			
Size	d	L	
5X30	5	30	
6X32	6	32	
8X38	8	38	
8X60	8	60	
10X60	10	60	

Expanding Heavy Duty One Shield Anchor

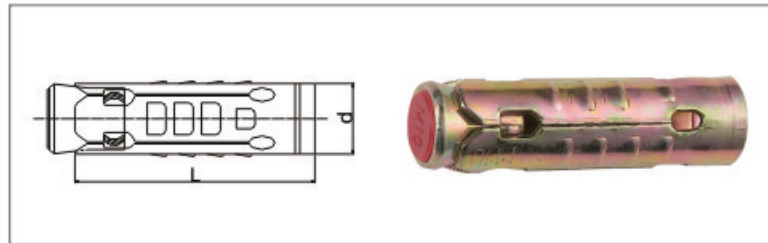

Specification			
M6			
M8			
M10			
M12			
M20			


- 2Pcs Heavy Duty Shell Anchor Without Nut & Bolt
- 2Pcs Heavy Duty Shell Anchor With Hex Nut (G4)
- 2Pcs Heavy Duty Shell Anchor With Hex Bolt (G4.8)
- 2Pcs Heavy Duty Shell Anchor With C Hook Bolt
- 2Pcs Heavy Duty Shell Anchor With O Hook Bolt

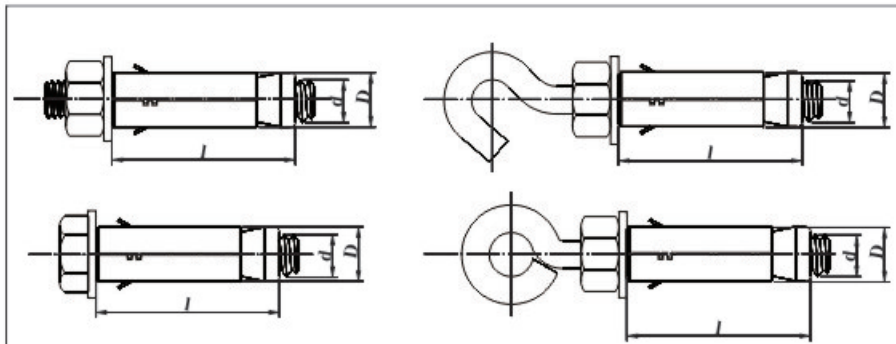


Specification				
Size	d	D	l	
M6	M6	12	45	
M8	M8	14	50	
M10	M10	16	60	
M12	M12	20	75	




- 3Pcs Heavy Duty Shell Anchor Without Nut & Bolt
- 3Pcs Heavy Duty Shell Anchor With Hex Nut (G4)
- 3Pcs Heavy Duty Shell Anchor With Hex Bolt (G4.8)
- 3Pcs Heavy Duty Shell Anchor With C Hook Bolt
- 3Pcs Heavy Duty Shell Anchor With O Hook Bolt

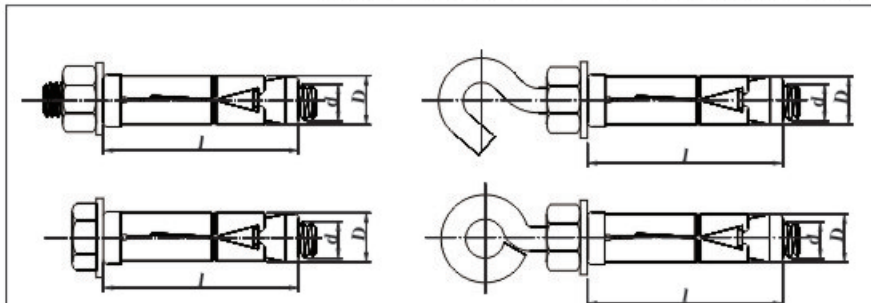

Specification				
Size	d	D	l	
M6	M6	12	45	
M8	M8	14	50	
M10	M10	16	60	
M12	M12	20	75	

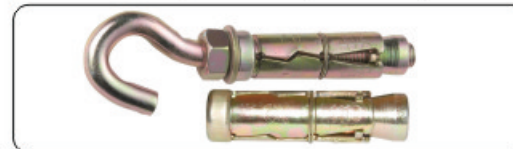


- 4Pcs Heavy Duty Shell Anchor Without Nut & Bolt
- 4Pcs Heavy Duty Shell Anchor With Hex Nut (G4)
- 4Pcs Heavy Duty Shell Anchor With Hex Bolt (G4.8)
- 4Pcs Heavy Duty Shell Anchor With C Hook Bolt
- 4Pcs Heavy Duty Shell Anchor With O Hook Bolt

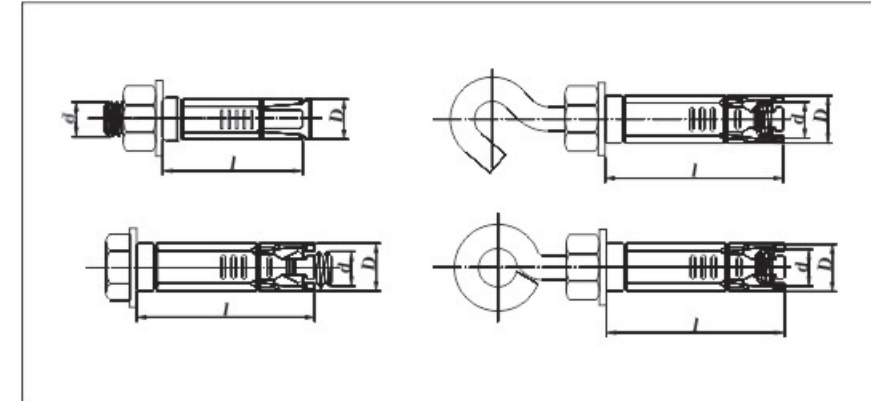

Specification				
Size	d	D	l	
M6	M6	10	40	
M8	M8	14	50	
M10	M10	16	60	
M12	M12	20	80	




Zinc Alloy Single Head Anchor

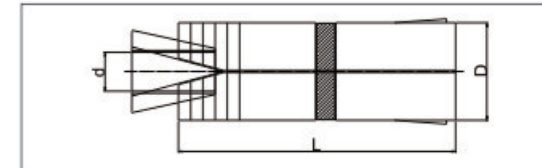


Specification		3/16"
		1/4"
		5/16"
		3/8"
		1/2"

Zinc Alloy Double Head Anchor

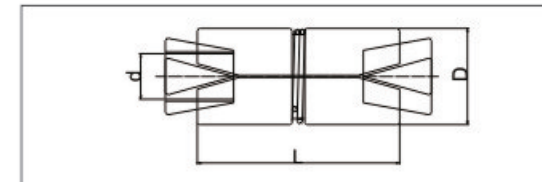


Specification		5/16
		3/8

Zinc Alloy Wooden Anchor

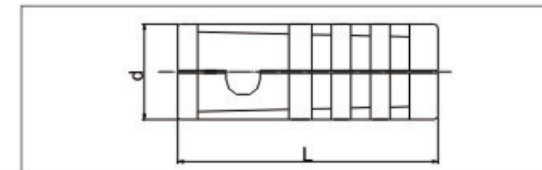

Specification	
1/4L	3/8L
1/4S	3/8S
5/16L	1/2L
5/16S	1/2S


Zinc Alloy Easy Drive Anchor (Single Point, Double Points, Three Points)

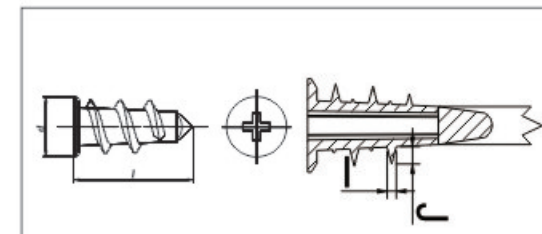

Specification		
Size	d	L
14X28	14	28
14X38	14	38
15X25	15	25
14X42	14	42
15X37	15	37
13X32	13	32
13X42	13	42
15X32	15	32




Zinc Alloy Anchor

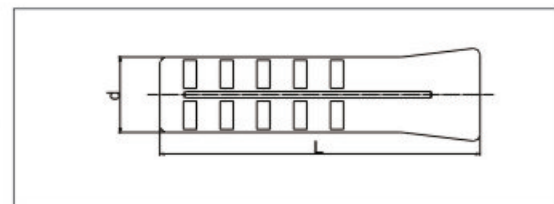

Specification	
6-8x3/4	10-14-1
6-8x1	10-14x1-1/2
6-8x1-1/2	16-18x1
10-14-3/4	16-18x1-1/2


Zinc Alloy Hammer Drive Anchor

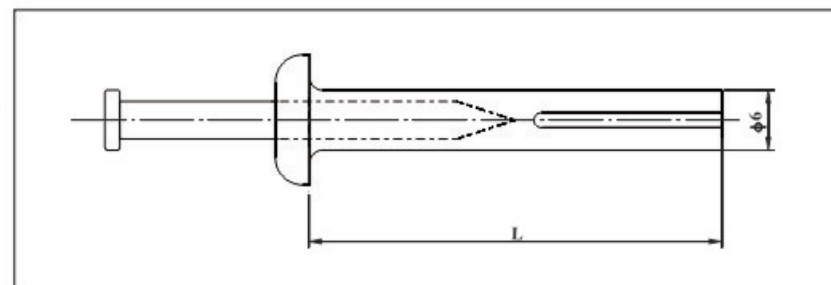


Specification		
Size	L	Pull Out Kgs
6X30	30	330
6X40	40	370
6X50	50	430
6X65	65	430




Tie Wire Anchor

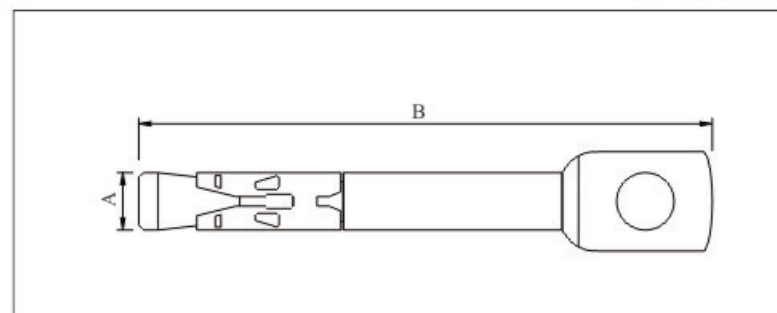

Specification	
6x40	6x50
6x55	6x60
6x65	




Pin Anchor

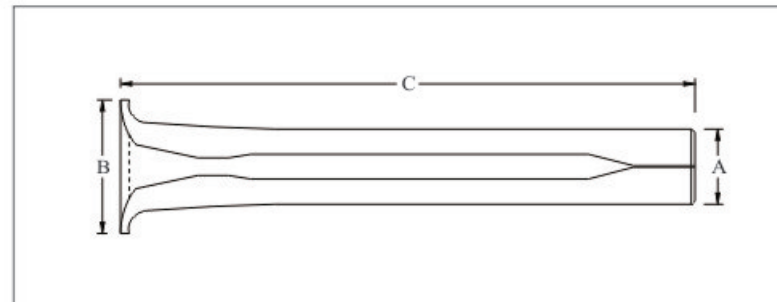

Specification		
6x30	6x100	8x150
6x40	8x70	8x180
6x50	8x90	8x200
6x60	8x110	
6x80	8x130	




Metal Heat Preservation Dowel Nail

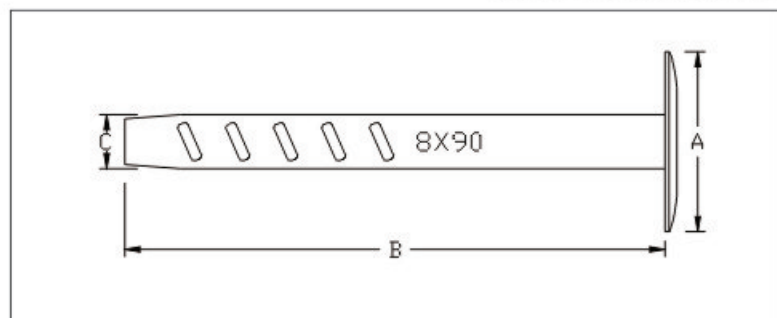

Specification		
8x50	8x110	8x200
8x60	8x140	8x220
8x80	8x150	8x240
8x90	8x170	8x300




Plastic Heat Preservation Dowel Nail

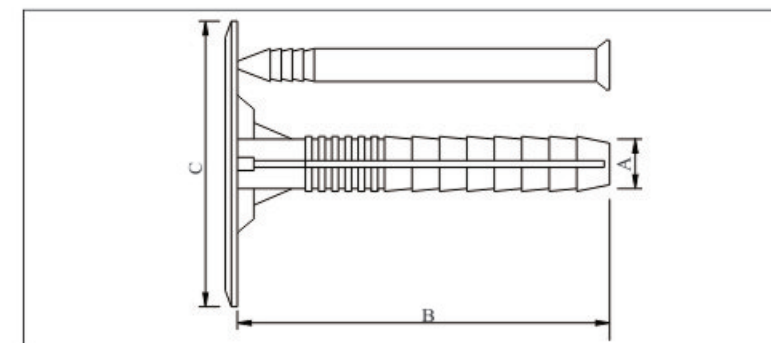

Specification		
8x60	10x80	10x140
8x80	10x90	10x160
8x100	10x100	10x180
8x120	10x110	10x200
10x70	10x120	10x220




Gravity / Spring Toggle Anchor

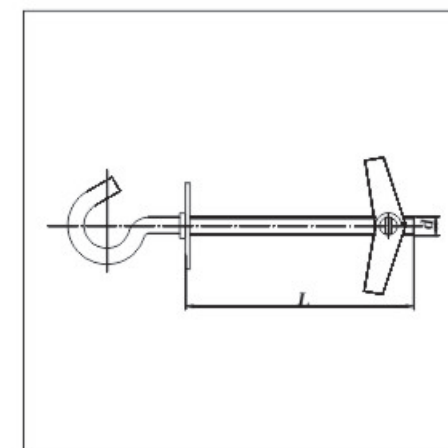

Specification				
Size	d	L	Drill Dia	Pcs/Box/Ctn
M4X75	M4	75	12	100X10/1000
M4X90	M4	90	12	100X10/1000
M4X100	M4	100	12	100X8/800
M5X75	M5	75	15	100X8/800
M5X90	M5	90	15	100X8/800
M5X100	M5	100	15	100X6/600
M6X75	M6	75	17	100X8/800
M6X90	M6	90	17	100X6/600
M6X100	M6	100	17	100X6/600

Plastic Hammer Drive Anchor

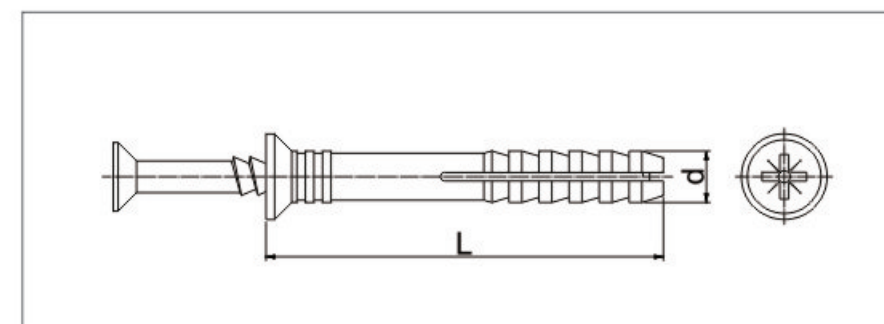

Specification			
Size	d	L	Pcs/Box/Ctn
5X30	5	30	100X10/1000
5X40	5	40	100X10/1000
6X40	6	40	100X8/800
6X60	6	60	100X6/600
6X80	6	80	100X6/600
8X60	8	60	100X6/600
8X80	8	80	100X4/400
8X100	8	100	100X4/400
8X120	8	120	100X4/400
10X80	10	80	100X4/400
10X100	10	100	100X4/400
10X120	10	120	100X4/400
10X140	10	140	100X3/300
10X160	10	160	100X3/300



Fish Type Nylon Drive Anchor

		Specification	
		4x20	8x40
		5x25	10x50
		6x30	12x60
		14x75	16x80

Connection Nylon Anchor

		Specification	
		5X32	10X62
		6X37	12X72
		7X37	14X76
		8X52	

Fish Type Nylon Drive Anchor

		Specification	
		6x30	8x60(double wing)
		6x55(double wing)	10x80(double wing)
		8x40	12x50

Gypsum Board Expansion Pipe

		Specification	
		13x17	14x22
		10x33	17x42
		13x42	15x44
		15x33	12x26
		13x40	16x38
		14x43	


Aircraft Shaped Expansion Pipe

		Specification	
		10x30	
		10x36	
		10x29	
		10x45	






Confirmat Screw

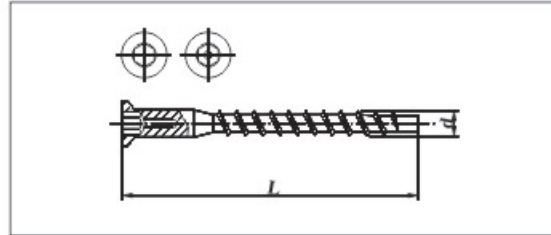


Size	d	L
5X40	5.0	40
5X50	5.0	50
6.4X50	6.4	50
7X40	7.0	40
7X50	7.0	50
7X70	7.0	70

Furniture Nut




Specification	
M6x12	M8x16

Confirmat Screw




Specification	
6.3X50	7X70
7X50	7X85
7X60	

"Z" Allen Key




Specification	48X20 (SW4)
---------------	-------------

"L" Allen Key

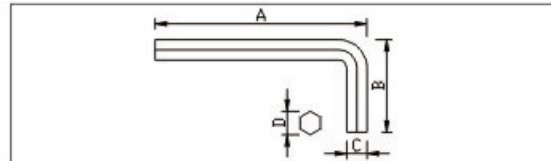



Specification	
54x28(SW2.5)	120x31(SW5)
60x22(SW3)	86x36(SW6)
66x28(SW4)	88x33(SW8)
76x31(SW5)	145x33(SW8)

Tee Nut (DIN 1624)

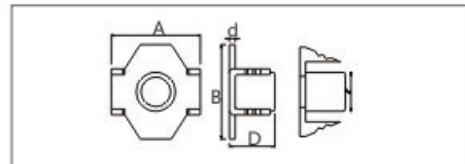



Specification	
M4x8	M6x15
M5x8	M8x11
M6x9	M12x14
M6x12	

Shelf Support

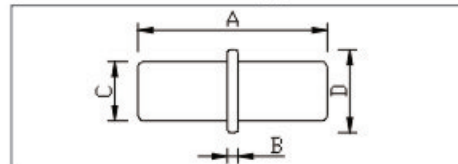

Specification	
5cm	8cm
6cm	9cm



Combine Screw

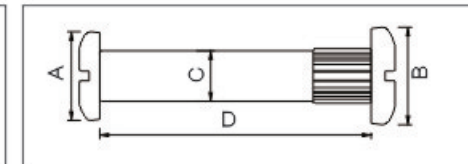

Specification	
5x30	7.5x30
7.5x20	7.5x35
7.5x25	7.5x40




Hex Socket Pan Head Confirmat Screw

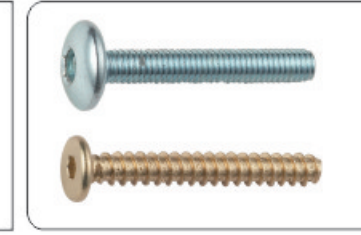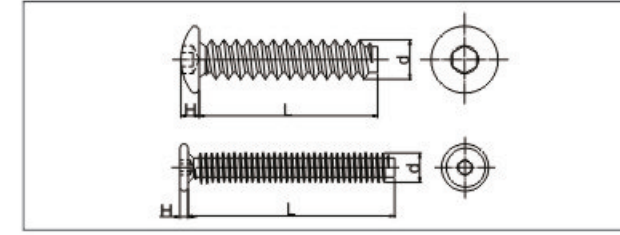



Specification	
6x40	6x70
6x50	6x80
6x60	6x90

Internal And External Thread Nut

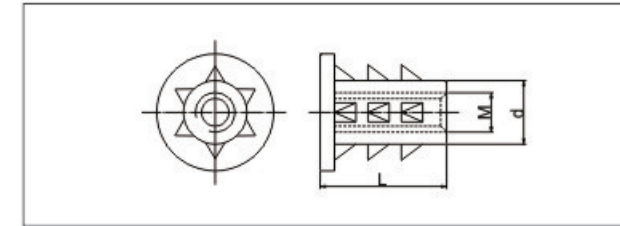



Specification	
6	18/20
7/8	22
10	26
13	32
16	

Internal And External Thread Nut

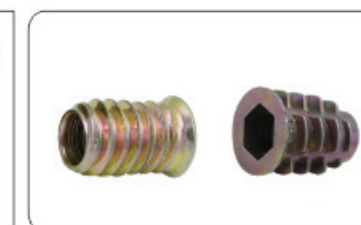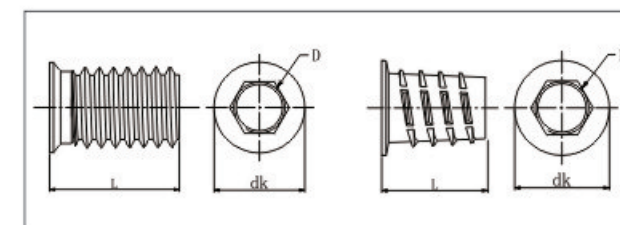


Specification	
6x10	8x15
6x13	8x18
6x15	8x20L
6x18	8x20H
8x13	8x25

Pozi Drive Furniture Screw With Plastic




Specification	6.3x34.1
	6.3x38.1
	6.3x44.1

Pozi Drive Confirmat Screw




Specification	6.3x34.1
	6.3x38.1
	6.3x44.1

Eccentric Nut




Specification	M6x10x13
	M6x10x16
	M6x10x20


Blind Rivet, ST/ST, AL/ST, A2/A2, A4, AL/A2

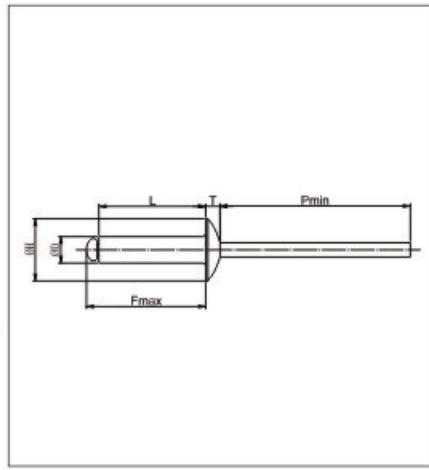


Specification	
D	L
3.0	6-16
3.2	6-25
4.0	6-30
4.8	6-35
6.0	6-40
6.4	6-40

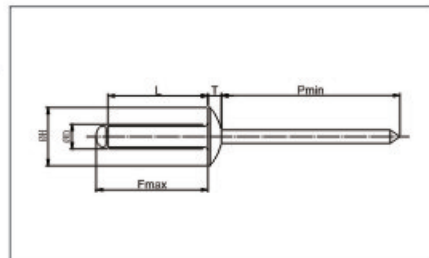



Specification	
D	L
3.0	6-16
3.2	6-25
4.0	6-30
4.8	6-35
6.0	6-40
6.4	6-40

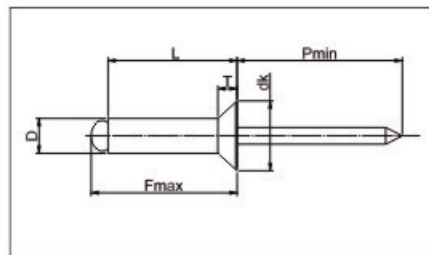

Specification	
D	L
3.0	6-16
3.2	6-25
4.0	6-30
4.8	6-35
6.0	6-40
6.4	6-40

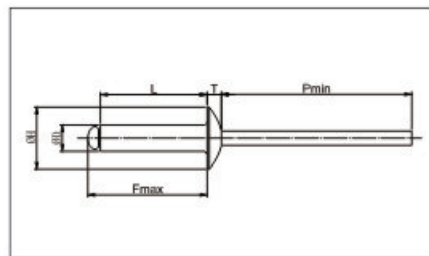

Specification	
D	L
3.0	6-16
3.2	6-25
4.0	6-30
4.8	6-35
6.0	6-40
6.4	6-40

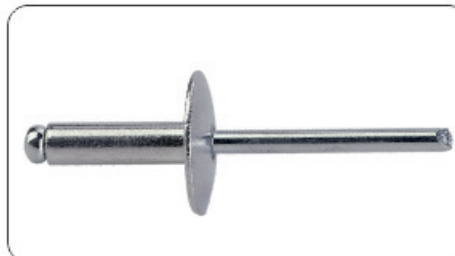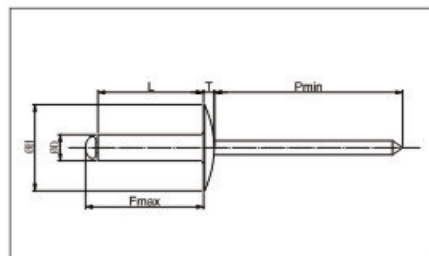


Specification	
D	L
3.0	6-16
3.2	6-25
4.0	6-30
4.8	6-35
6.0	6-40
6.4	6-40


Rigging




S Hook / Stainless Steel S Hook


		Specification	3/4
			1/2
			1#
			1-1/2
			2#
			1-1/2

Stainless Steel Ring



		Specification	3/8 x 2
			1/4 x 1-1/2
			3/16 x 1

Eye Bolt
(DIN580)


Specification	
M6	M16
M8	M20
M10	M24
M12	M30
M14	M36


Ring Nut
(DIN582)


Specification	
M6	M16
M8	M20
M10	M24
M12	M30
M14	M36

Turnbuckle
(DIN1480)


Specification	
5x70	14x140
6x110	16x170
8x110	20x200
10x125	24x255
12x125	

S Hook



Specification	
3MM	7MM
4MM	8MM
5MM	10MM
6MM	

Rotating Ring 401



Rotating Ring 402




Rotating Ring 403




Specification	1/4	5/16	3/8	1/2	5/8	7/8	1
---------------	-----	------	-----	-----	-----	-----	---

Short Link Chain (DIN766)

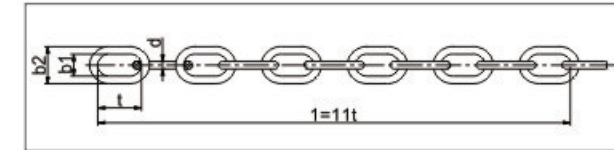

Specification	
2MM	12MM
3MM	14MM
4MM	16MM
5MM	18MM
6MM	23MM
8MM	26MM
10MM	28MM

Long Link Chain (DIN763)

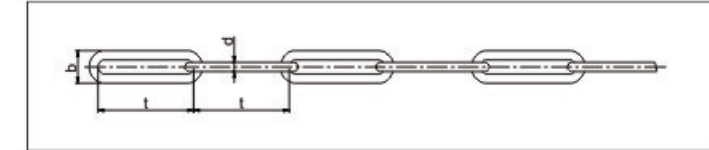

Specification	
2MM	10MM
3MM	12MM
4MM	14MM
5MM	16MM
6MM	18MM
8MM	20MM



Steel Wire Rope
(DIN3055)


Specification	
2MM	8MM
3MM	10MM
4MM	12MM
5MM	13MM
6MM	16MM

Steel Wire Rope With PVC
(DIN3055)



Specification	
2MM	8MM
3MM	10MM
4MM	12MM
5MM	13MM
6MM	16MM

Wire Rope Clip (DIN741)



Specification	
3MM	16MM
5MM	20MM
6MM	22MM
8MM	24MM
10MM	26MM
12MM	30MM
14MM	34MM

Straight (Shackle)




Specification	
5MM	18MM
6MM	20MM
8MM	22MM
10MM	25MM
12MM	28MM
14MM	32MM
16MM	

Thimble
(DIN6899A) / (DIN6899B)


Specification	
4	12
5	14
6	16
8	18
10	20

Duplex Wire Rope Clip

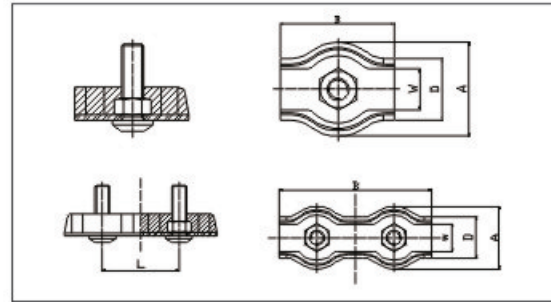

Specification	Specification
C-SWR2b	C-SWR6b
C-SWR3b	C-SWR8b
C-SWR4b	C-SWR10b
C-SWR5b	

Snap Hook (DIN5299D) / (DIN5299C)



Specification	
4x40	9x90
5x50	10x100
6x60	11x120
7x70	12x140
8x80	13x160

Oval Aluminum Cover (DIN3093)



Specification	
7MM	18MM
11MM	22MM
14MM	28MM

Quick Link



Specification	
3.5MM	8MM
4MM	10MM
5MM	12MM
6MM	14MM
7MM	16MM

Lift Hook (DIN689)



Specification	
250	4000
500	5000
1000	6300
2500	
3200	

Galvanized Chain Card



Specification	
M6	M16
M8	M20
M10	M24
M12	M30
M14	

Lift Hook




Specification	
0.75	3.2
1.0	5.0
1.5	7.0
2.0	

Pulley Wheel




Specification	
15MM	40MM
20MM	50MM
25MM	65MM
30MM	

Germany Type Hose Clamp (9mm/12mm)

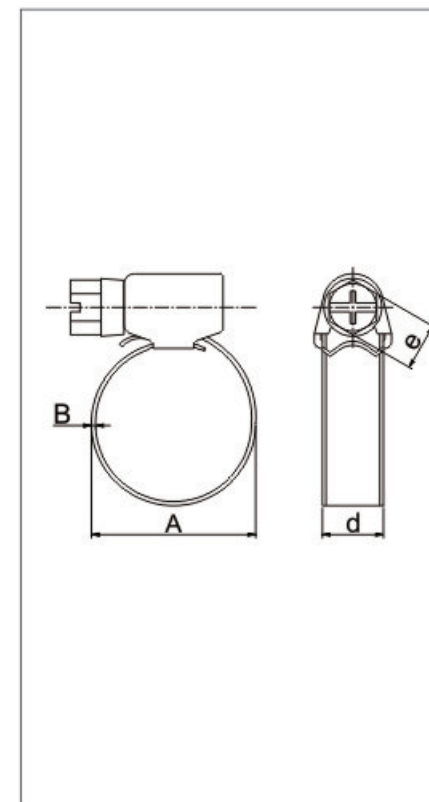


Bandwidth(mm)		Size	PCS/Bag	PCS/Ctn
9	12	8-12	50	1000
9	12	10-16	50	1000
9	12	12-20	50	1000
9	12	16-27	50	1000
9	12	20-32	50	1000
9	12	25-40	50	500
9	12	30-45	50	500
9	12	32-50	50	500
9	12	40-60	20	500
9	12	50-70	20	500
9	12	60-80	20	500
9	12	70-90	20	500
9	12	80-100	20	500
9	12	90-110	20	500
9	12	100-120	20	500
9	12	110-130	20	250
9	12	120-140	20	250
9	12	130-150	20	250
9	12	140-160	20	250
9	12	150-170	10	250
9	12	160-180	10	250

American Type Hose Clamp (12.7mm)

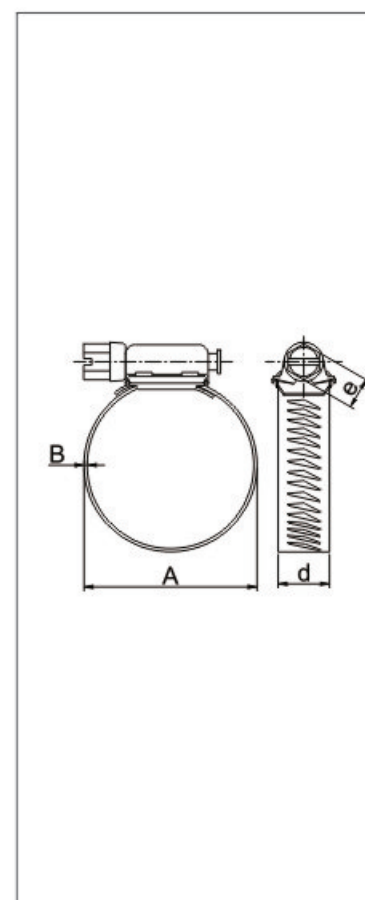


Bandwidth(mm)		Size	Pcs/Bag	Pcs/Ctn
12.7		12-22	50	1000
12.7		11-25	50	1000
12.7		14-27	50	1000
12.7		18-32	50	1000
12.7		14-38	20	1000
12.7		19-44	20	1000
12.7		35-51	20	500
12.7		38-57	20	500
12.7		40-64	20	500
12.7		46-70	20	500
12.7		50-76	20	500
12.7		59-82	20	250
12.7		65-89	20	250
12.7		76-92	20	250
12.7		78-101	20	250
12.7		98-114	20	250
12.7		105-127	20	250
12.7		120-146	20	250
12.7		130-150	20	250
12.7		120-165	10	250
12.7		145-178	10	250
12.7		130-203	10	200
12.7		235-254	10	100
12.7		280-305	10	100

Robust Clamp With Solid Nut

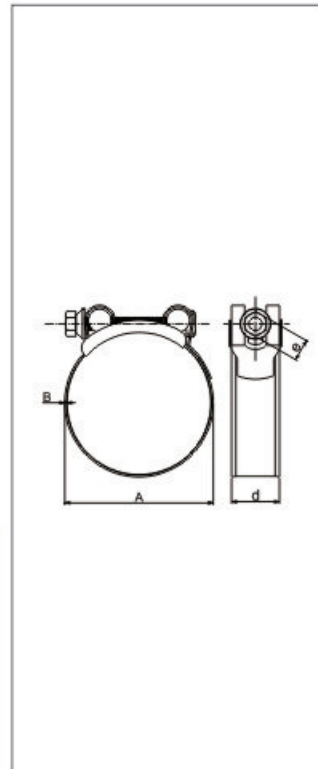


Size	Screw	W1 Thickness*width	W2/W4 Thickness*width	PCS/Ctn
17-19	M5*40	0.6*18	0.6*18	200
20-22	M5*40	0.6*18	0.6*18	200
23-25	M5*40	0.6*18	0.6*18	200
26-28	M5*40	0.6*18	0.6*18	200
29-31	M6*50	0.8*20	0.6*20	200
32-35	M6*50	0.8*20	0.6*20	200
36-39	M6*50	0.8*20	0.6*20	200
40-43	M6*50	0.8*20	0.6*20	100
44-47	M6*55	1.2*22	0.8*22	100
48-51	M6*55	1.2*22	0.8*22	100
52-55	M6*55	1.2*22	0.8*22	100
56-59	M6*55	1.2*22	0.8*22	100
60-63	M6*55	1.2*22	0.8*22	100
64-67	M6*55	1.2*22	0.8*22	100
68-73	M8*70	1.5*24	0.8*24	100
74-79	M8*70	1.5*24	0.8*24	50
80-85	M8*70	1.5*24	0.8*24	50
86-91	M8*70	1.5*24	0.8*24	50
92-97	M8*70	1.5*24	0.8*24	50
98-103	M8*75	1.5*24	0.8*24	50
104-112	M8*75	1.5*24	0.8*24	50
122-130	M8*75	1.5*24	0.8*24	50
214-116	M10*100	1.7*26	1.0*26	25
227-239	M10*100	1.7*26	1.0*26	25
240-252	M10*100	1.7*26	1.0*26	25

Single Type Pipe Clamp

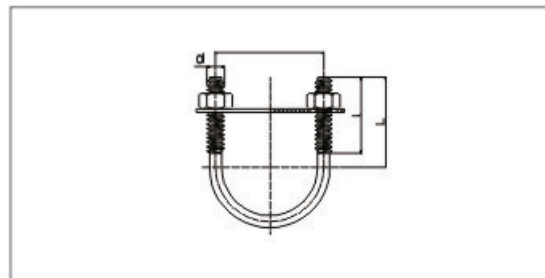


Specification	
D-SWR2s	D-SWR6s
D-SWR3s	D-SWR8s
D-SWR4s	D-SWR10s
D-SWR5s	

Pipe Clamp

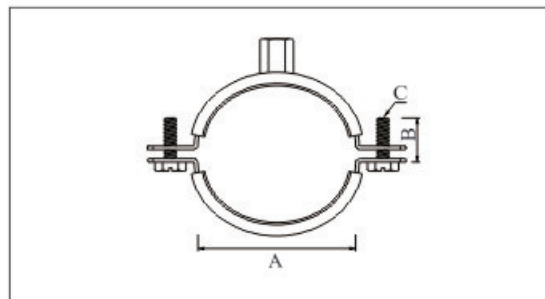


Specification	
15-18MM	60-64MM
20-24MM	75-80MM
26-30MM	106-112MM
32-36MM	133-140MM
38-42MM	159-165MM
51-55MM	

Double Wire Hose Clamp

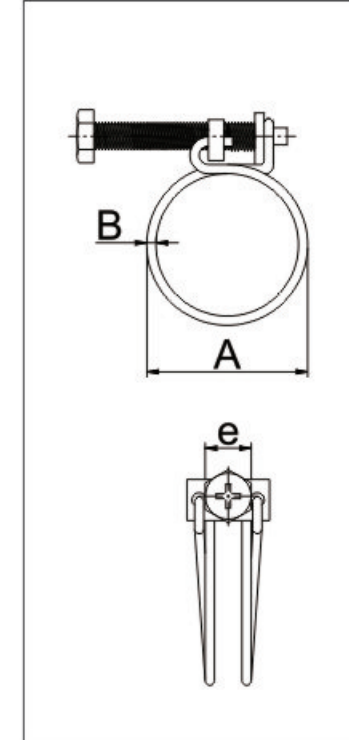

Size	Wire	Diamstr	PCS/Ctn
11-14	1.5	M5*30	2000
13-16	1.5	M5*30	2000
15-18	1.5	M5*30	2000
17-20	1.8	M5*30	2000
19-22	1.8	M5*30	1000
20-24	1.8	M5*30	1000
22-26	1.8	M5*30	1000
24-28	1.8	M5*30	1000
26-30	2.2	M6*40	500
28-32	2.2	M6*40	500
31-35	2.2	M6*40	500
34-38	2.2	M6*40	500
35-40	2.2	M6*40	500
37-42	2.2	M6*40	500
40-45	2.2	M6*40	500
43-48	2.2	M6*50	500
45-50	2.2	M6*50	500
47-52	2.2	M6*50	500
50-55	2.2	M6*50	500
53-58	2.2	M6*50	250
55-60	2.2	M6*60	250
54-62	2.2	M6*60	250
60-65	2.2	M6*60	250
63-68	2.2	M6*60	250
65-70	2.2	M6*70	250
70-75	2.2	M6*70	250
75-80	2.2	M6*70	250
80-85	2.5	M6*70	250
84-90	2.5	M6*70	250
89-95	2.5	M6*70	250
94-100	2.5	M6*80	250
98-105	2.5	M6*80	250
103-110	2.5	M6*80	250
108-115	2.5	M6*80	250
113-120	2.5	M6*80	250

Hollow Heavy Duty Hose Clamp

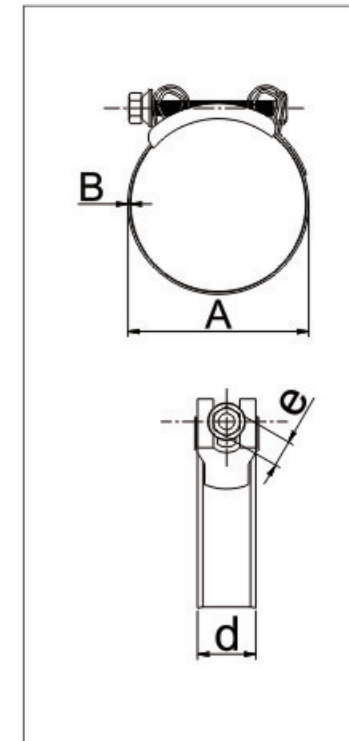

Size	Bandwidth	PCS/Ctn
28-30	21*1.2	200
31-33	21*1.2	200
34-36	21*1.2	200
37-40	21*1.2	200
40-44	21*1.2	250
44-48	21*1.2	200
48-52	21*1.2	100
52-57	21*1.2	100
57-62	21*1.2	100
62-67	21*1.2	100
67-72	21*1.2	100
72-78	21*1.2	100
74-84	21*1.2	100
84-90	21*1.2	100
90-96	21*1.2	100
96-102	21*1.2	50
102-108	21*1.2	50
108-114	21*1.2	50
114-120	21*1.2	50
120-128	21*1.2	50
128-136	21*1.2	50
136-144	21*1.2	50
144-154	21*1.2	50
154-164	21*1.2	50
164-174	21*1.2	50
175-187	21*1.2	50
188-200	21*1.2	25
201-213	21*1.2	25
214-226	21*1.2	25

